


3-Terminal 1.5A Positive Adjustable Regulator

Description


The LM317MSI are monolithic integrated circuit in SOT-223 packages intended for use as positive adjustable voltage regulators. They are designed to supply more than 1.5A of load current with an output voltage adjustable over a 1.2 to 37V range. The nominal output voltage is selected by means of only a resistive divider, making the device exceptionally easy to use and eliminating the stocking of many fixed regulators.

Features

- ◆ Output Voltage Range : 1.2 TO 37V
- ◆ Output Current in excess of 1.5A
- ◆ 0.1% Line and Load Regulation Voltages
- ◆ Floating Operation For High
- ◆ Complete Series of Protections:
Current Limiting, Thermal Shutdown and SOA Control

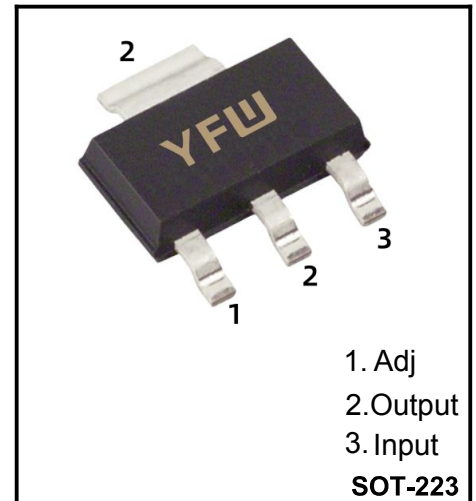

BlockDiagram

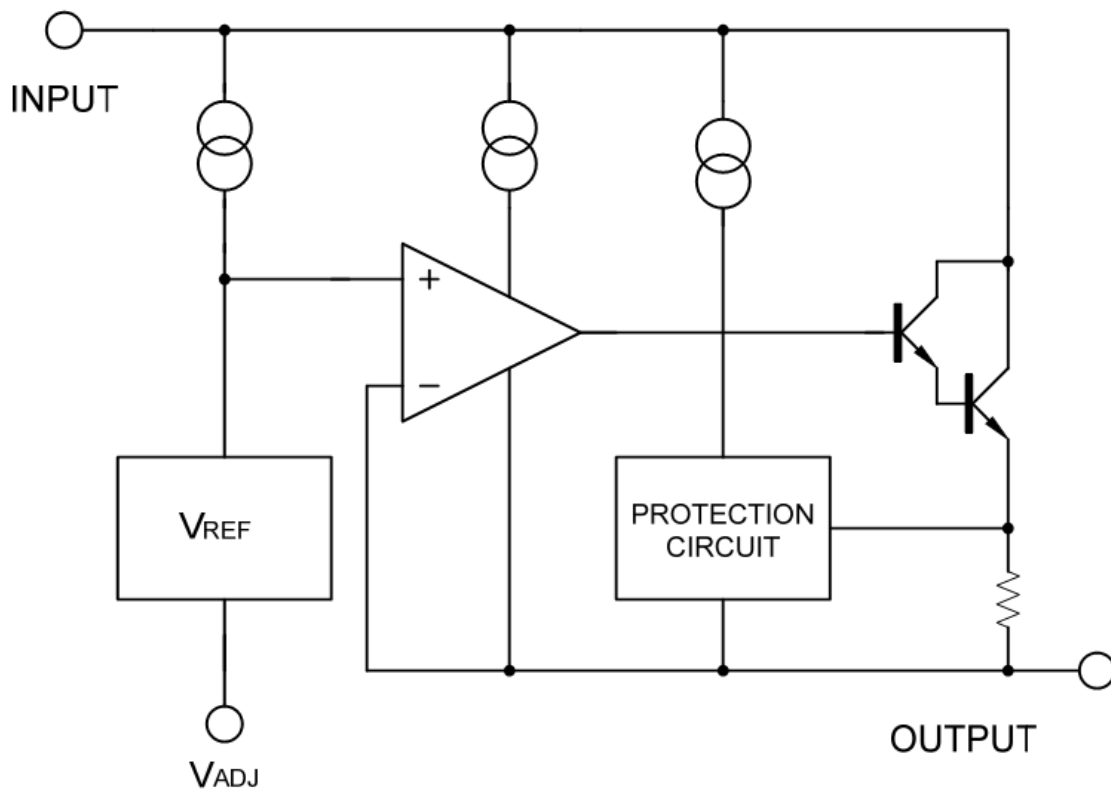

Absolute Maximum Ratings


Symbol	Parameter	Value	Unit
V_{i-o}	Input-output Differential Voltage	40	V
I_o	Output Current	Intenrally Limited	
V_o	Out put Voltage	5	V
T_{OP}	Operating Junction Temperature	$0 \sim +125$	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	$-60 \sim +150$	$^{\circ}\text{C}$

Electrical Characteristics

($V_i - V_o = 5\text{ V}$, $I_o = 500\text{ mA}$, $I_{MAX} = 1.5\text{ A}$ and $P_{MAX} = 20\text{ W}$, unless otherwise specified)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Line Regulation	ΔV_o	$V_i - V_o = 3\text{ to }40\text{ V}$ $T_j = 25^{\circ}\text{C}$			0.04	%V
					0.07	
Load Regulation	ΔV_o	$V_o \leq 5\text{ V}$ $I_o = 10\text{ mA} \sim I_{MAX} 1.5\text{ A}$ $T_j = 25^{\circ}\text{C}$			25	mV
					70	
		$V_o \geq 5\text{ V}$ $I_o = 10\text{ mA} \sim I_{MAX} 1.5\text{ A}$ $T_j = 25^{\circ}\text{C}$			0.5	%V
					1.5	
Adjustment Pin Current	I_{ADJ}	$T_j = 25^{\circ}\text{C}$			100	μA
Adjustment Pin Current	ΔI_{ADJ}	$V_i - V_o = 2.5\text{ to }40\text{ V}$ $I_o = 10\text{ mA} \sim I_{MAX} 1.5\text{ A}$			5	μA
Output Voltage Drift	$\Delta V / \Delta T$	$I_o = 5\text{ mA}$		-0.8		$\text{mV}/^{\circ}\text{C}$
Reference Voltage (between pin3 and pin1)	V_{REF}	$V_i - V_o = 2.5\text{ to }40\text{ V}$ $I_o = 10\text{ mA} \sim I_{MAX} 1.5\text{ A}$ $P_D \leq P_{MAX}$	1.2	1.25	1.3	V
Output Voltage Temperature Stability	$\Delta V_o / \Delta T$			1		%
Minimum Load Current	$I_{O(min)}$	$V_i - V_o = 40\text{ V}$			10	mA
Maximum Load Current	$I_{O(max)}$	$V_i - V_o \leq 15\text{ V}$, $P_D < P_{MAX}$	1.5			A
		$V_i - V_o = 40\text{ V}$, $P_D < P_{MAX}$, $T_j = 25^{\circ}\text{C}$		0.4		

Application Circuits

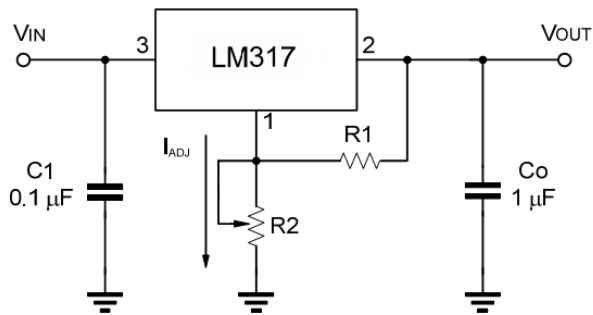

$$V_{out} = 1.25 \cdot (1 + R2/R1) + I_{ADJ} \cdot R2$$

Fig.1 Programmable Voltage Regulator

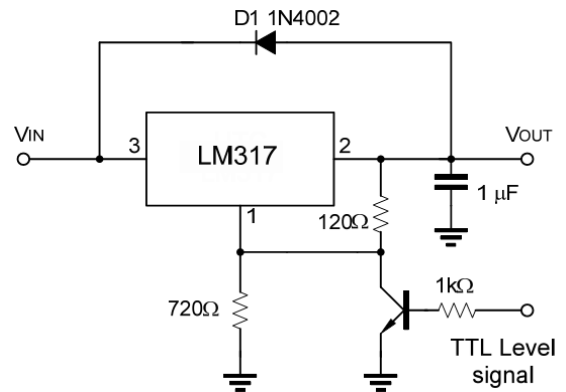


Fig.2 Regulator with ON-off controll

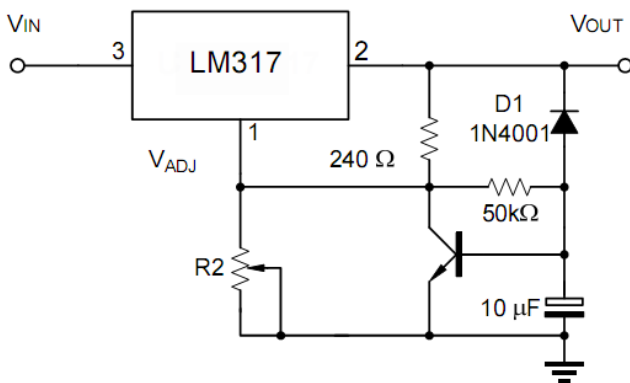


Fig.3 Soft Start Application

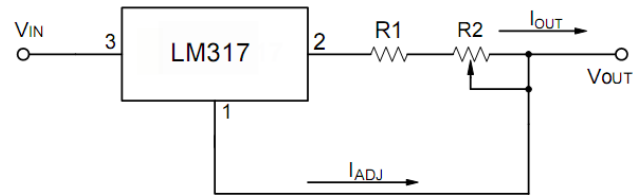


Fig.4. Constant Current Application

Typical Characteristics

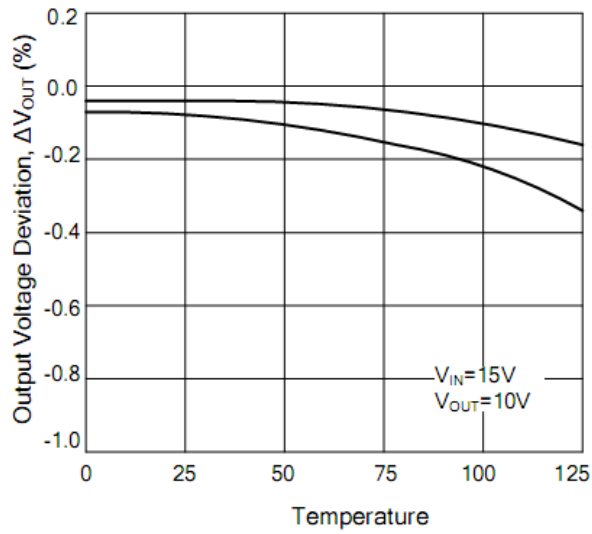


Fig.1. Load Regulation vs. temperature

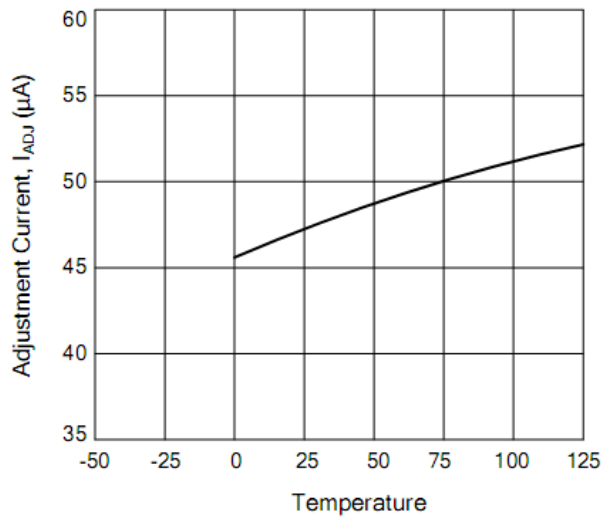


Fig.2. Adjustment Current vs. Temperature

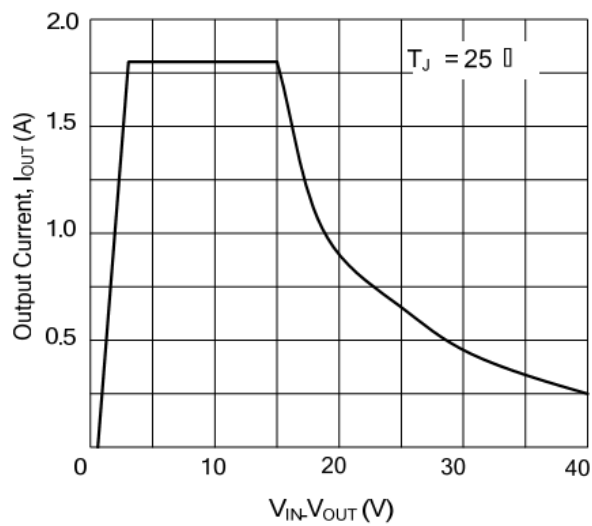


Fig.3. Currents Limit

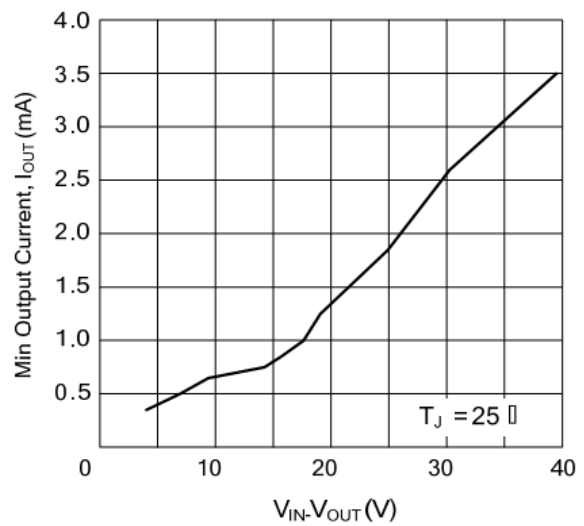


Fig.4. Minimum Operating Current

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-223	Tape/Reel, 7" reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton
	Tape/Reel, 13" reel	2500pcs/Reel	5000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-223

Dlm	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.50	1.80	0.059	0.071
A1	0.00	0.10	0.000	0.004
A2	1.50	1.70	0.059	0.067
b	0.65	0.75	0.026	0.030
c	0.20	0.30	0.008	0.012
D	6.40	6.60	0.252	0.260
D1	2.90	3.10	0.114	0.122
E	3.30	3.70	0.130	0.146
E1	6.85	7.15	0.270	0.281
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	1.65	1.85	0.065	0.073
L1	0.90	1.15	0.035	0.045

The recommended mounting pad size

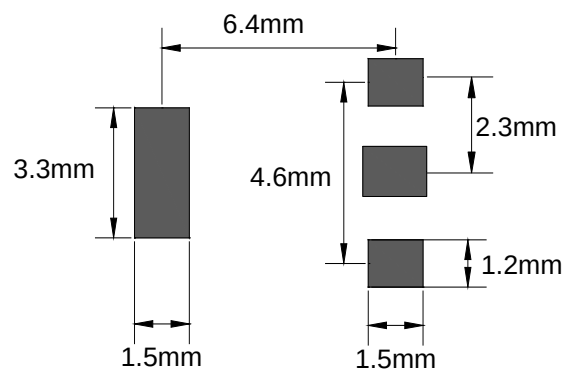

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.