

30mA Low Power LDO

FEATURES

- ♦ Low power consumption
- ♦ Low voltage drop
- ♦ Low temperature coefficient
- ♦ High input voltage (upto 30V)
- ♦ Output voltage accuracy: tolerance $\pm 3\%$

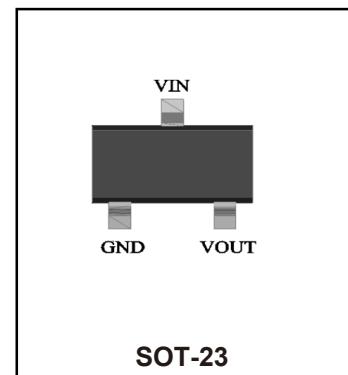
APPLICATIONS

- ♦ Battery-powered equipment
- ♦ Communication equipment
- ♦ Audio/Video equipment

General Description

The HT71xx-1 series is a set of three-terminal low power high voltage regulators implemented in CMOS technology. They allow input voltages as high as 30V. They are available with several fixed output voltages ranging from 2.1V to 5.0V. CMOS technology ensures low voltage drop and low quiescent current.

Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain variable voltages and currents.



Selection Table

| Part No. | Output Voltage | Package | Marking |
|----------|----------------|---------|---------------------|
| HT7121-1 | 2.1V | SOT23 | 71xx-1 (for SOT23) |
| HT7123-1 | 2.3V | | 71xx-1# (for SOT23) |
| HT7125-1 | 2.5V | | 71xx-1+ (for SOT23) |
| HT7127-1 | 2.7V | | |
| HT7130-1 | 3.0V | | |
| HT7133-1 | 3.3V | | |
| HT7136-1 | 3.6V | | |
| HT7144-1 | 4.4V | | |
| HT7150-1 | 5.0V | | |

Absolute Maximum Ratings ($T_a = 25^\circ C$)

| Parameter | Symbol | Value | Unit |
|---------------------------|------------------|---------------|------|
| Supply Voltage | V _{IN} | - 3 to + 30 | V |
| Power Dissipation | P _{tot} | 500 | mW |
| Operating Temperature | T _A | - 40 to + 85 | °C |
| Storage Temperature Range | T _{stg} | - 50 to + 125 | °C |

Electrical Characteristics
HT7121-1,+2.1VOutputType
Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 4.1V | I _{OUT} =10mA | 2.037 | 2.100 | 2.163 | V |
| I _{OUT} | Output Current | 4.1V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 4.1V | 1mA≤I _{OUT} ≤20mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 100 | — | mV |
| I _{SS} | Current Consumption | 4.1V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 3.1V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 4.1V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.37 | — | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+2V with a fixed load.

HT7123-1,+2.3VOutputType
Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 4.3V | I _{OUT} =10mA | 2.231 | 2.300 | 2.369 | V |
| I _{OUT} | Output Current | 4.3V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 4.3V | 1mA≤I _{OUT} ≤20mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 100 | — | mV |
| I _{SS} | Current Consumption | 4.3V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 3.3V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 4.3V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.39 | — | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+2V with a fixed load.

HT7125-1, +2.5V Output Type
Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 4.5V | I _{OUT} =10mA | 2.425 | 2.500 | 2.575 | V |
| I _{OUT} | Output Current | 4.5V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 4.5V | 1mA≤I _{OUT} ≤20mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 100 | — | mV |
| I _{SS} | Current Consumption | 4.5V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 3.5V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 4.5V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.41 | — | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+2V with a fixed load.

HT7127-1, +2.7V Output Type
Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 4.7V | I _{OUT} =10mA | 2.619 | 2.700 | 2.781 | V |
| I _{OUT} | Output Current | 4.7V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 4.7V | 1mA≤I _{OUT} ≤20mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 100 | — | mV |
| I _{SS} | Current Consumption | 4.7V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 3.7V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 4.7V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.43 | — | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at $V_{IN} = V_{OUT} + 2V$ with a fixed load.

HT7130-1, +3.0V Output Type
Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|------|-------|------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 5V | I _{OUT} =10mA | 2.91 | 3.00 | 3.09 | V |
| I _{OUT} | Output Current | 5V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 5V | 1mA≤I _{OUT} ≤20mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 100 | — | mV |
| I _{SS} | Current Consumption | 5V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 4V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 5V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.45 | — | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at $V_{IN} = V_{OUT} + 2V$ with a fixed load.

HT7133-1, +3.3V Output Type
Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 5.5V | I _{OUT} =10mA | 3.201 | 3.300 | 3.399 | V |
| I _{OUT} | Output Current | 5.5V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 5.5V | 1mA≤I _{OUT} ≤30mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 100 | — | mV |
| I _{SS} | Current Consumption | 5.5V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 4.5V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 5.5V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.5 | — | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at $V_{IN} = V_{OUT} + 2V$ with a fixed load.

HT7136-1, +3.6V Output Type
Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 5.6V | I _{OUT} =10mA | 3.492 | 3.600 | 3.708 | V |
| I _{OUT} | Output Current | 5.6V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 5.6V | 1mA≤I _{OUT} ≤30mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 60 | — | mV |
| I _{SS} | Current Consumption | 5.6V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 4.6V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 5.6V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.6 | — | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+2V with a fixed load.

HT7144-1, +4.4V Output Type
Ta=25°C

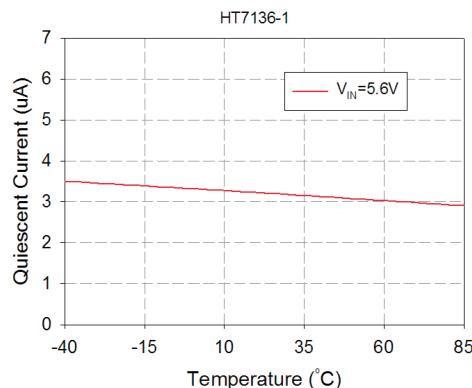
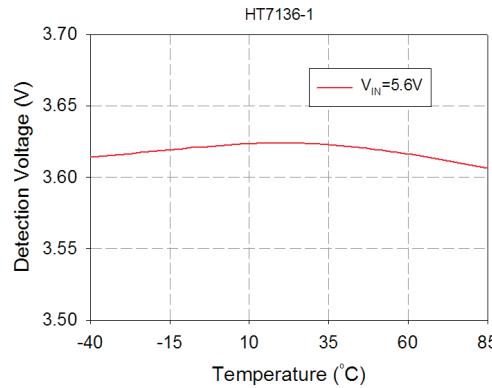
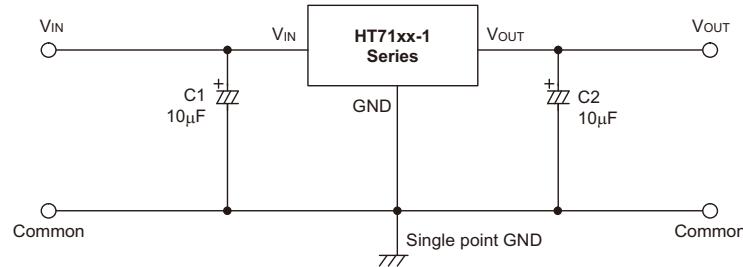
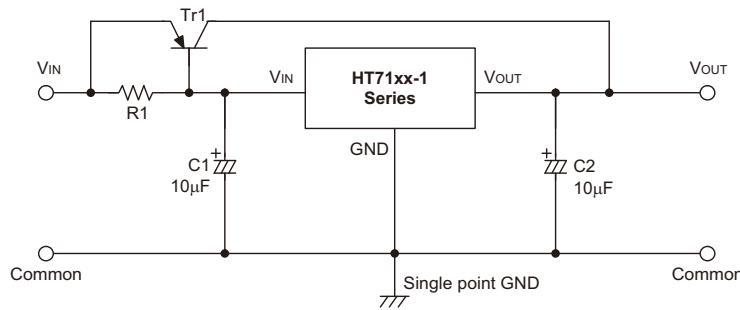
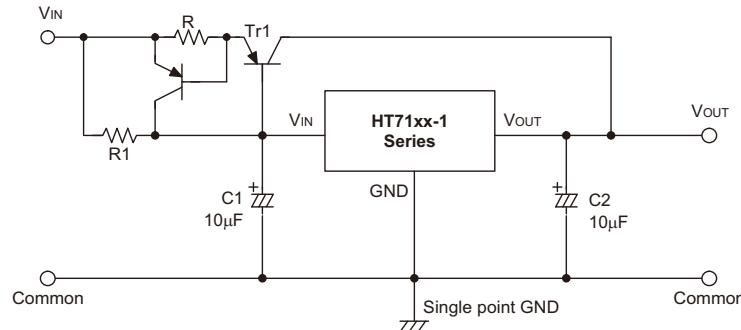
| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 6.4V | I _{OUT} =10mA | 4.268 | 4.400 | 4.532 | V |
| I _{OUT} | Output Current | 6.4V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 6.4V | 1mA≤I _{OUT} ≤30mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 100 | — | mV |
| I _{SS} | Current Consumption | 6.4V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 5.4V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 6.4V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.7 | — | mV/°C |

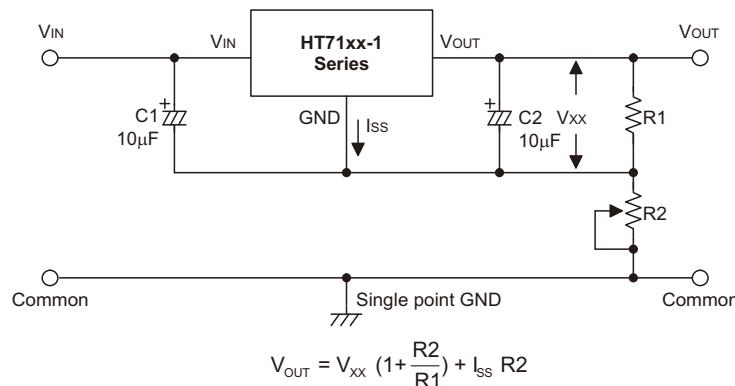
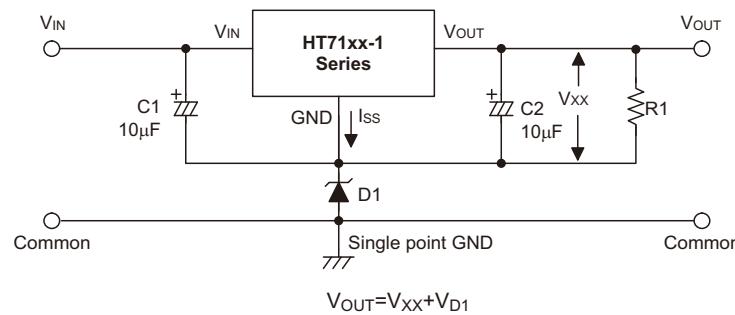
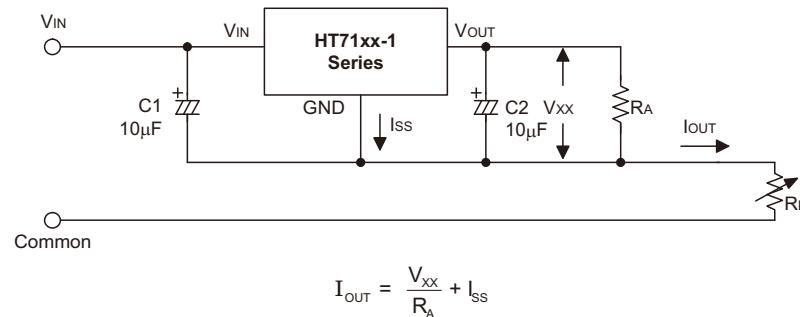
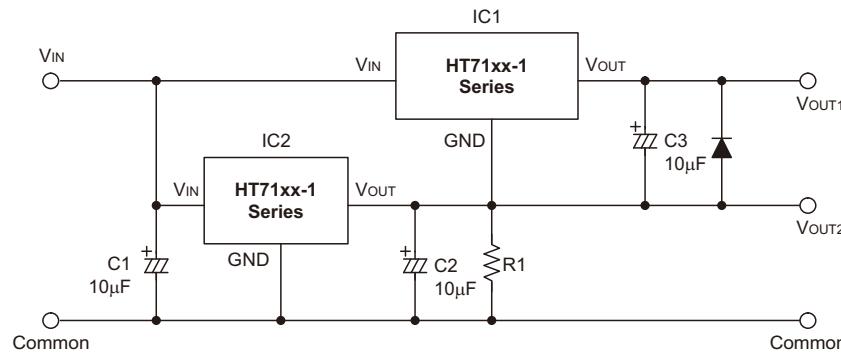
Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+2V with a fixed load.

HT7150-1, +5.0V Output Type
Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|--|------|-------|------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 7V | I _{OUT} =10mA | 4.85 | 5.00 | 5.15 | V |
| I _{OUT} | Output Current | 7V | — | 20 | 30 | — | mA |
| ΔV _{OUT} | Load Regulation | 7V | 1mA≤I _{OUT} ≤30mA | — | 60 | 100 | mV |
| V _{DIF} | Voltage Drop (Note) | — | I _{OUT} =1mA, ΔV _{OUT} =2% | — | 100 | — | mV |
| I _{SS} | Current Consumption | 7V | No load | — | 2.5 | 4.0 | μA |
| ΔV _{OUT} ΔV _{IN} × V _{OUT} | Line Regulation | — | 6V≤V _{IN} ≤24V I _{OUT} =1mA | — | 0.2 | — | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 28 | V |
| ΔV _{OUT} ΔT _a | Temperature Coefficient | 7V | I _{OUT} =10mA -40°C<Ta<85°C | — | ±0.75 | — | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the

Typical Performance Characteristics

Application Circuits
Basic Circuits

High Output Current Positive Voltage Regulator

Short-Circuit Protection by Tr1


Circuit for Increasing Output Voltage

Circuit for Increasing Output Voltage

Constant Current Regulator

Dual Supply


Ordering information

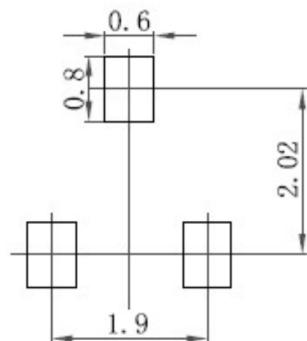
| Package | Packing Description | Base Quantity | Packing Quantity |
|---------|---------------------|---------------|-------------------------------|
| SOT-23 | Tape/Reel,7"reel | 3000pcs/Reel | 24000PCS/Box 120000PCS/Carton |

Package Dimensions

SOT-23

| Dim. | Millimeter (mm) | | mil | |
|------|--------------------|------|------|------|
| | Min. | Max. | Min. | Max. |
| A | 0.9 | 1.15 | 35 | 45 |
| A1 | 0.1 | | 3.9 | |
| bp | 0.38 | 0.48 | 15 | 19 |
| C | 0.09 | 0.15 | 3.54 | 5.9 |
| D | 2.8 | 3.0 | 110 | 118 |
| E | 1.2 | 1.4 | 47 | 55 |
| E | 1.9 | | 75 | |
| E1 | 0.95 | | 37 | |
| HE | 2.1 | 2.55 | 83 | 100 |
| L_p | 0.15 | 0.45 | 5.9 | 18 |
| Q | 0.45 | 0.55 | 18 | 22 |
| v | 0.2 | | 7.9 | |
| W | 0.1 | | 4 | |

The recommended mounting pad size



Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices). YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.