


■ PNP Transistor

■ Features

- Excellent h_{FE} linearity
- Complements the 2SC4081

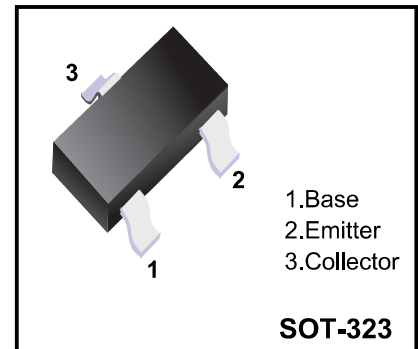

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CBO}	-60	V
Collector - Emitter Voltage	V_{CEO}	-50	
Emitter - Base Voltage	V_{EBO}	-6	
Collector Current - Continuous	I_C	-150	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature range	T_{stg}	-55 to 150	


■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CBO}	$I_C = -50 \mu\text{A}, I_E = 0$	-60			V
Collector- emitter breakdown voltage	V_{CEO}	$I_C = -1 \text{ mA}, I_B = 0$	-50			
Emitter - base breakdown voltage	V_{EBO}	$I_E = -50 \mu\text{A}, I_C = 0$	-6			
Collector-base cut-off current	I_{CBO}	$V_{CB} = -60 \text{ V}, I_E = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -6 \text{ V}, I_C = 0$			-0.1	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -50 \text{ mA}, I_B = -5 \text{ mA}$			-0.5	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C = -50 \text{ mA}, I_B = -5 \text{ mA}$			-1.2	
DC current gain	h_{FE}	$V_{CE} = -6 \text{ V}, I_C = -1 \text{ mA}$	120		560	
Collector output capacitance	C_{ob}	$V_{CB} = -12 \text{ V}, I_E = 0, f = 1 \text{ MHz}$		4	5	pF
Transition frequency	f_T	$V_{CE} = -12 \text{ V}, I_C = -2 \text{ mA}, f = 30 \text{ MHz}$		140		MHz

■ Classification of h_{FE}

Type	2SA1576A-Q	2SA1576A-R	2SA1576A-S
Range	120-270	180-390	270-560
Marking	FQ	FR	FS

■ Typical Characteristics

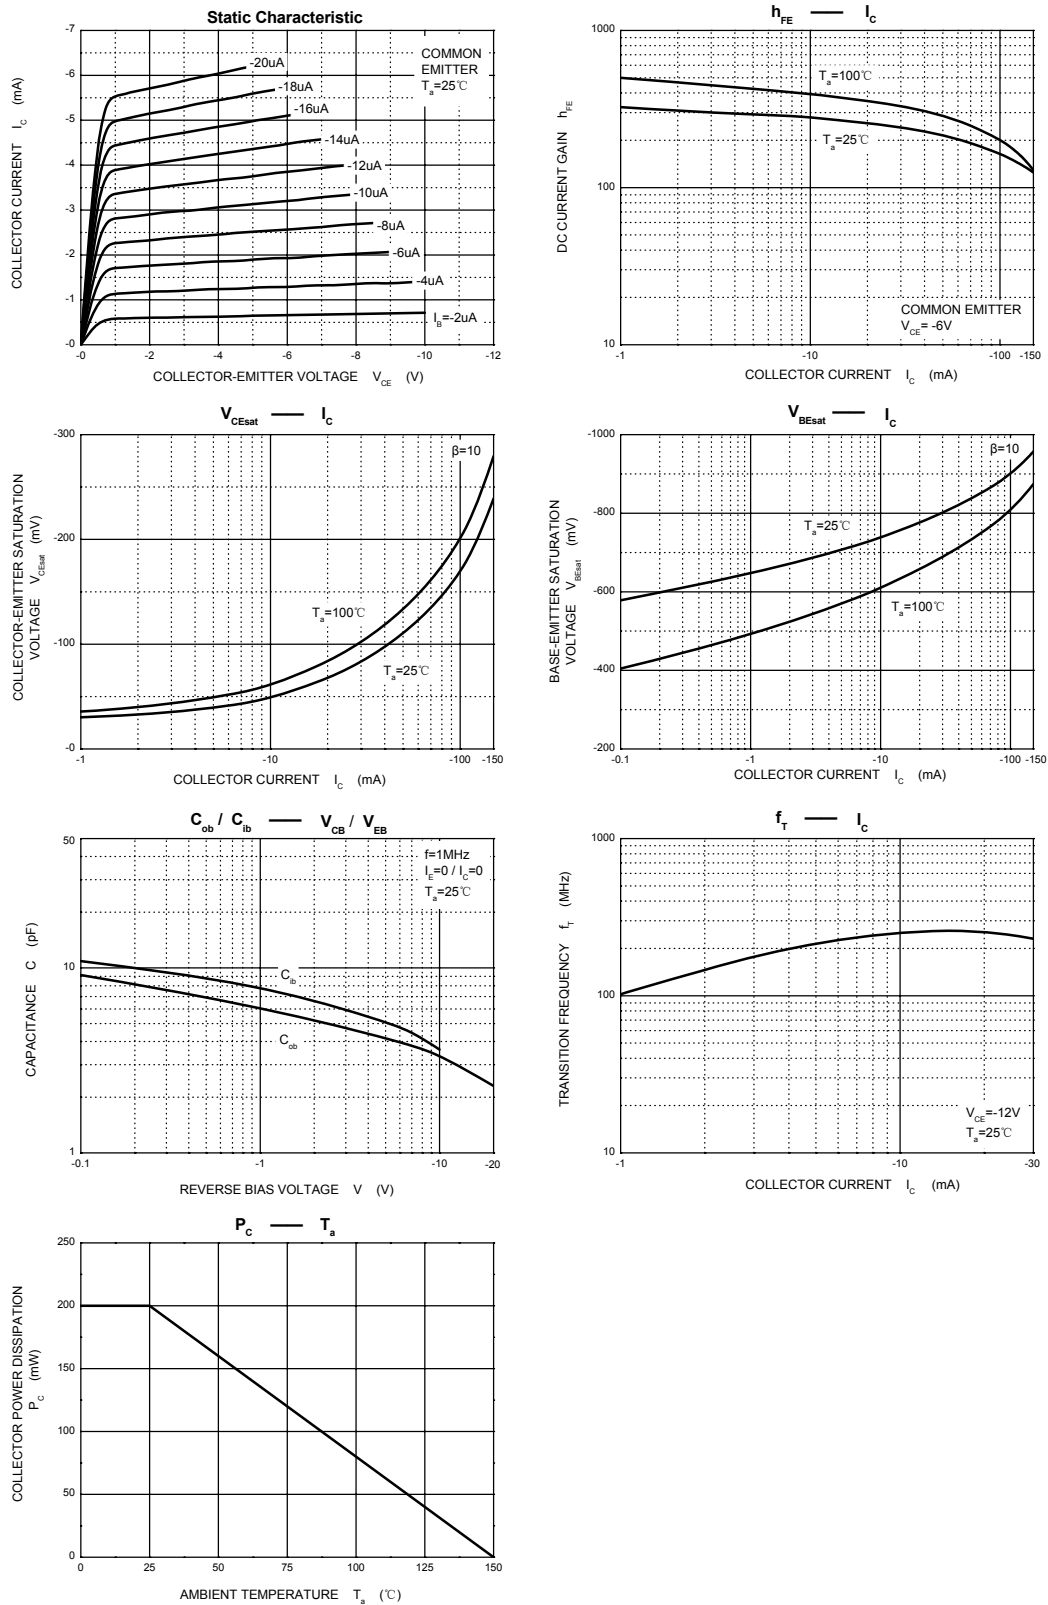

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-323	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-323

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.8	1.1	32	43
A1	0.1		4	
bp	0.3	0.4	12	16
C	0.10	0.25	4	10
D	1.8	2.2	71	87
E	1.15	1.35	45	53
E	1.3		51	
E1	0.65		26	
HE	2.0	2.2	79	87
Lp	0.15	0.45	6	18
Q	0.13	0.23	5.1	9
v	0.2		8	
W	0.2		8	

The recommended mounting pad size



Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.