


■ NPN General Purpose Transistor

■ Features

- General purpose transistor.

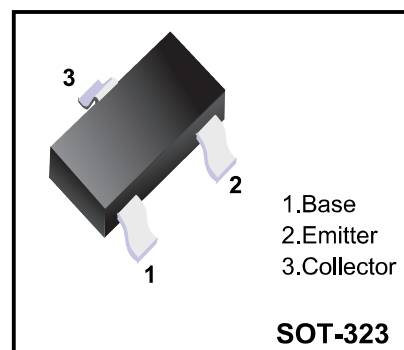

Marking Code

MMBT2222AW

1P

■ Absolute Maximum Ratings $T_a = 25^{\circ}\text{C}$

Parameter	Symbol	Rating	Unit
Collector-emitter voltage	V_{CE0}	40	V
Collector-base voltage	V_{CB0}	75	V
Emitter-base voltage	V_{EB0}	6.0	V
Collector current	I_C	600	mA
Total Device Dissipation FR-5 Board	P_D	150	mW
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	833	$^{\circ}\text{C}/\text{W}$
Junction temperature	T_j	150	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^{\circ}\text{C}$

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1.0\text{ mA}, I_B = 0$	40			V
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 10\text{ }\mu\text{A}, I_E = 0$	75			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\text{ }\mu\text{A}, I_C = 0$	6			V
Base cutoff current	I_{BL}	$V_{CE} = 60\text{ V}, V_{EB} = 3.0\text{ V}$			20	nA
Collector cutoff current	I_{CEX}	$V_{CE} = 60\text{ V}, V_{EB} = 3.0\text{ V}$			10	nA
DC current gain *	H_{FE}	$I_C = 150\text{ mA}, V_{CE} = 10\text{ V}$	100		300	
Collector-emitter saturation voltage *	$V_{CE(sat)}$	$I_C = 150\text{ mA}, I_B = 15\text{ mA}$			0.3	V
		$I_C = 500\text{ mA}, I_B = 50\text{ mA}$			1.0	
Base-emitter saturation voltage *	$V_{BE(sat)}$	$I_C = 150\text{ mA}, I_B = 15\text{ mA}$	0.6		1.2	
		$I_C = 500\text{ mA}, I_B = 50\text{ mA}$			2.0	
Current-gain-bandwidth product	f_T	$I_C = 20\text{ mA}, V_{CE} = 20\text{ V}, f = 100\text{ MHz}$	300			MHz
Output capacitance	C_{obo}	$V_{CB} = 10\text{ V}, I_E = 0, f = 1.0\text{ MHz}$			8.0	pF
Input capacitance	C_{ibo}	$V_{EB} = 0.5\text{ V}, I_C = 0, f = 1.0\text{ MHz}$			30	pF
Input impedance	h_{ie}	$V_{CE} = 10\text{ V}, I_C = 10\text{ mA}, f = 1.0\text{ kHz}$	0.25		1.25	k Ω
Voltage feedback ratio	h_{re}	$V_{CE} = 10\text{ V}, I_C = 10\text{ mA}, f = 1.0\text{ kHz}$			4.0	$\times 10^{-4}$
Small-signal current gain	h_{fe}	$V_{CE} = 10\text{ V}, I_C = 10\text{ mA}, f = 1.0\text{ kHz}$	75		375	
Output admittance	h_{oe}	$V_{CE} = 10\text{ V}, I_C = 10\text{ mA}, f = 1.0\text{ kHz}$	25		200	μmhos
Noise figure	NF	$V_{CE} = 10\text{ V}, I_C = 100\text{ }\mu\text{A}, R_s = 1.0\text{ k}\Omega, f = 1.0\text{ kHz}$			4.0	dB
Delay time	t_d	$V_{CC} = 3.0\text{ V}, V_{BE} = -0.5\text{ V}, I_C = 150\text{ mA}, I_{B1} = 15\text{ mA}$			10	ns
Rise time	t_r				25	ns
Storage time	t_s	$V_{CC} = 30\text{ V}, I_C = 150\text{ mA}, I_{B1} = I_{B2} = 15\text{ mA}$			225	ns
Fall time	t_f				60	ns

* Pulse test: pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2.0\%$.

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-323	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-323

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.8	1.1	32	43
A1	0.1		4	
bp	0.3	0.4	12	16
C	0.10	0.25	4	10
D	1.8	2.2	71	87
E	1.15	1.35	45	53
E	1.3		51	
E1	0.65		26	
HE	2.0	2.2	79	87
Lp	0.15	0.45	6	18
Q	0.13	0.23	5.1	9
v	0.2		8	
W	0.2		8	

The recommended mounting pad size



Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.