

Standard Surface Mounted Rectifiers

Reverse Voltage - 1600 to 2000 V

Forward Current - 1.0 A


FEATURES

- ◆The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆Idea for printed circuit board
- ◆Glass passivated Junction chip
- ◆Low reverse leakage
- ◆High forward surge current capability
- ◆High temperature soldering guaranteed
250°C/10 seconds at terminals

MECHANICAL DATA

- ◆Case : Molded plastic body
- ◆Terminals : Solder plated, solderable per
MIL-STD-750,Method 2026
- ◆Polarity : Polarity symbol marking on body
- ◆Mounting Position : Any
- ◆Weight : 0.0014 ounce, 0.038 grams

Pinning

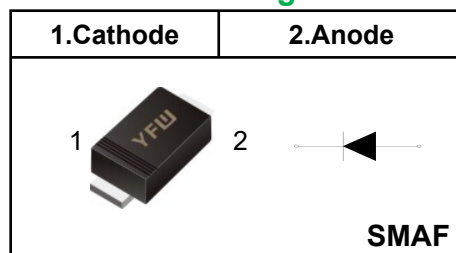

Marking Code

SM513F	YFW SM513F
SM516F	YFW SM516F
SM520F	YFW SM520F

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbols	SM513F	SM516F	SM520F	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	1600	1800	2000	V
Maximum RMS voltage	V_{RMS}	1120	1260	1400	V
Maximum DC Blocking Voltage	V_{DC}	1600	1800	2000	V
Maximum Average Forward Rectified Current at $T_L = 100^\circ\text{C}$	$I_{(AV)}$	1.0			A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load	I_{FSM}	30.0			A
Maximum Instantaneous Forward Voltage at 1.0 A	V_F	1.10			V
Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A = 100^\circ\text{C}$	I_R	10 500			uA
Typical junction capacitance (Note1)	C_J	18.0			pF
Typical Thermal Resistance	$R_{\theta JA}$	70			°C/W
Operating Junction Temperature Range	T_j	-55 ~ +150			°C
Storage Temperature Range	T_{stg}	-55 ~ +150			°C

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

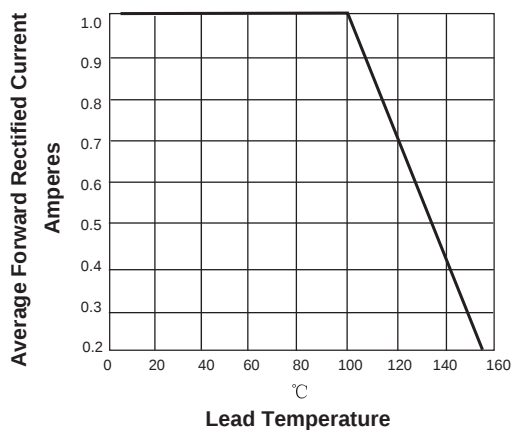


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

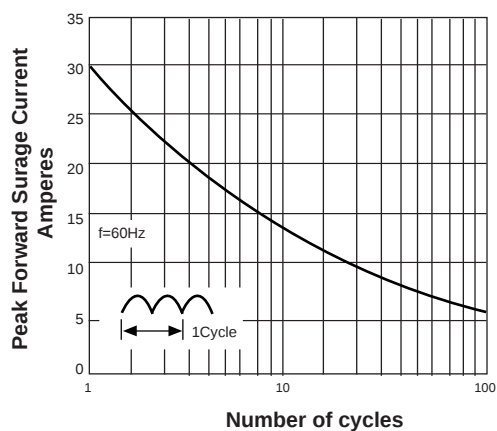


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS



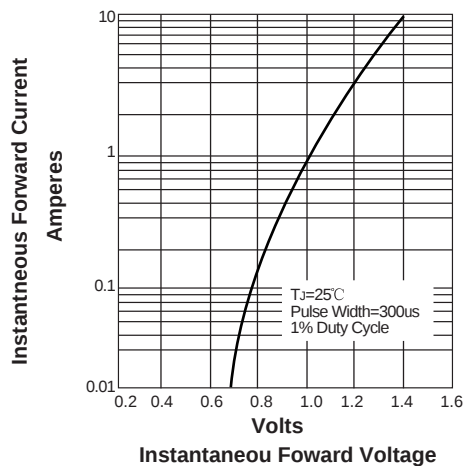


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

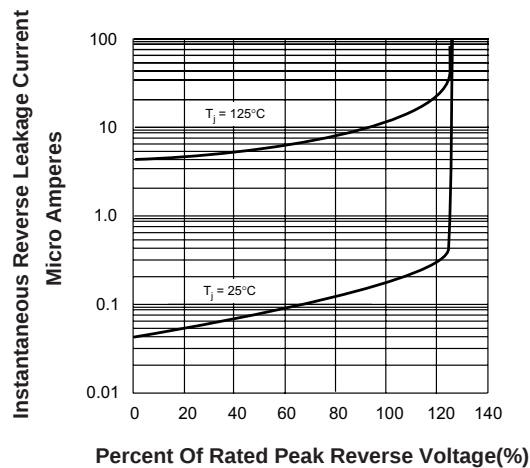

Marking Diagram

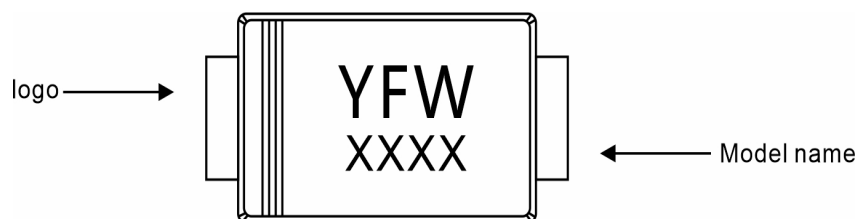

Ordering information


Package	Packing Description	Packing Quantity
SMAF	Tape/Reel, 13" reel	10000PCS/Reel 100000PCS/Carton
	Tape/Reel, 7" reel	3000PCS/Reel 120000PCS/Carton

Package Dimensions

SMAF

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.1	35	43
C	0.12	0.20	4.7	7.9
D	3.3	3.7	130	146
E	2.4	2.7	94	106
e	1.3	1.6	51	63
g	0.8	1.2	31	47
HE	4.4	4.9	173	193
∠	7°			

The recommended mounting pad size

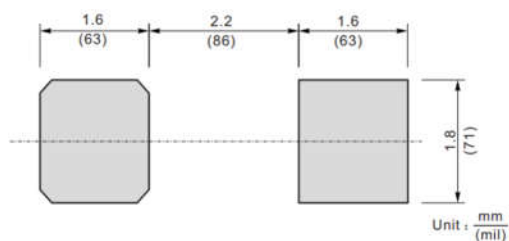

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.