


Low Dropout Linear Regulator

Features


- Low dropout voltage
- Load regulation: 0.2% typical
- Optimized for Low Voltage
- On-chip thermal limiting
- 1A Adjustable/Fixed Low Dropout Linear Regulator
- Three-terminal adjustable or fixed low drop out
1.2V, 1.25V, 1.5V, 1.8V, 1.9V, 2.5V, 2.85V, 3.3V, 5V. Regulators

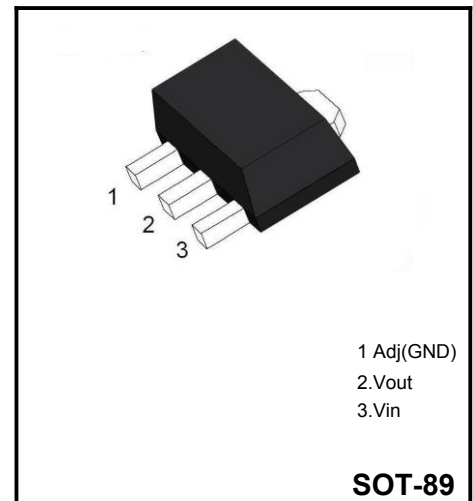

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Maximum Input Voltage	V _{in}	18	V
Power Dissipation	P _D	Internally Limited	
Operating Junction Temperature Range	T _J	150	°C
Storage Temperature	T _{ST}	-65 to +150	°C

Block Diagram

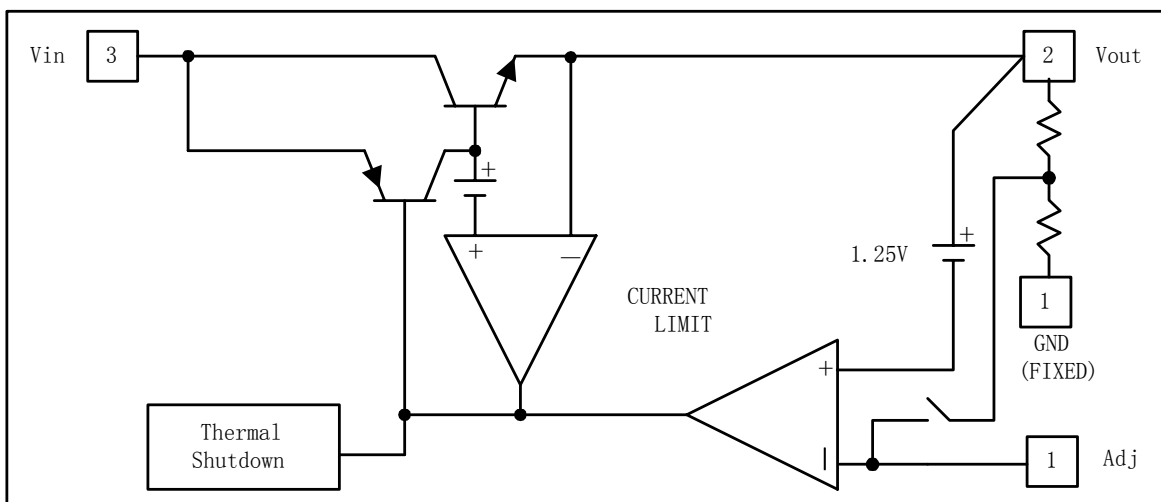

Electrical Characteristics (Ta=25℃, unless otherwise specified)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Reference Voltage	VREF	YFW1117-ADJ	10mA ≤ IOUT ≤ 800mA, 1.5V ≤ VIN - VOUT ≤ 12V	1.225	1.25	1.275	V
Output Voltage	VOUT	YFW1117-1.2	0 ≤ IOUT ≤ 800mA, 2.6V ≤ VIN - VOUT ≤ 12V	1.175	1.2	1.225	
		YFW1117-1.25	0 ≤ IOUT ≤ 800mA, 2.65V ≤ VIN - VOUT ≤ 12V	1.238	1.25	1.275	
		YFW1117-1.5	0 ≤ IOUT ≤ 800mA, 2.9V ≤ VIN - VOUT ≤ 12V	1.47	1.5	1.53	
		YFW1117-1.8	0 ≤ IOUT ≤ 800mA, 3.2V ≤ VIN - VOUT ≤ 12V	1.764	1.8	1.836	
		YFW1117-1.9	0 ≤ IOUT ≤ 800mA, 3.3V ≤ VIN - VOUT ≤ 12V	1.862	1.9	1.938	
		YFW1117-2.5	0 ≤ IOUT ≤ 800mA, 3.9V ≤ VIN - VOUT ≤ 12V	2.45	5.5	2.55	
		YFW1117-2.85	0 ≤ IOUT ≤ 800mA, 4.25V ≤ VIN - VOUT ≤ 12V	2.822	2.85	2.878	
		YFW1117-3.3	0 ≤ IOUT ≤ 800mA, 4.75V ≤ VIN - VOUT ≤ 12V	3.234	3.3	3.366	
		YFW1117-5.0	0 ≤ IOUT ≤ 800mA, 6.5V ≤ VIN - VOUT ≤ 12V	4.9	5	5.1	
Line Regulation	ΔVOUT	YFW1117-ADJ	IOUT=10mA, 1.5V ≤ VIN-VOUT ≤ 12V		0.035	0.2	%
		YFW1117-1.2	IOUT=10mA, 2.6V ≤ VIN-VOUT ≤ 12V		9	12	mV
		YFW1117-1.25	IOUT=10mA, 2.65V ≤ VIN-VOUT ≤ 12V				
		YFW1117-1.5	IOUT=10mA, 2.9V ≤ VIN-VOUT ≤ 12V				
		YFW1117-1.8	IOUT=10mA, 3.2V ≤ VIN-VOUT ≤ 12V				
		YFW1117-1.9	IOUT=10mA, 3.3V ≤ VIN-VOUT ≤ 12V				
		YFW1117-2.5	IOUT=10mA, 3.9V ≤ VIN-VOUT ≤ 12V				
		YFW1117-2.85	IOUT=10mA, 4.25V ≤ VIN-VOUT ≤ 12V				
		YFW1117-3.3	IOUT=10mA, 4.75V ≤ VIN-VOUT ≤ 12V				
		YFW1117-5.0	IOUT=10mA, 6.5V ≤ VIN-VOUT ≤ 12V				
Load Regulation	ΔVOUT	YFW1117-ADJ	VIN-VOUT=3V, 10mA ≤ IOUT ≤ 800mA		0.2	0.4	%
		YFW1117-1.2	VIN=2.6V, 10mA ≤ IOUT ≤ 800mA		3	10	mV
		YFW1117-1.25	VIN=2.65V, 10mA ≤ IOUT ≤ 800mA				
		YFW1117-1.5	VIN=2.9V, 10mA ≤ IOUT ≤ 800mA				
		YFW1117-1.8	VIN=3.2V, 10mA ≤ IOUT ≤ 800mA				
		YFW1117-1.9	VIN=3.3V, 10mA ≤ IOUT ≤ 800mA				
		YFW1117-2.5	VIN=3.9V, 10mA ≤ IOUT ≤ 800mA				
		YFW1117-2.85	VIN=4.25V, 10mA ≤ IOUT ≤ 800mA				
		YFW1117-3.3	VIN=4.75V, 10mA ≤ IOUT ≤ 800mA				
		YFW1117-5.0	VIN=6.5V, 10mA ≤ IOUT ≤ 800mA				
Dropout Voltage	VIN-VOUT	YFW1117-XXX	ΔVOUT, ΔVREF=1%, IOUT=0.1A		1.11	1.2	V
			ΔVOUT, ΔVREF=1%, IOUT=0.5A		1.18	1.25	
			ΔVOUT, ΔVREF=1%, IOUT=0.8A		1.26	1.3	
Current Limit	Ilimit	YFW1117-XXX	VIN-VOUT=5V, TJ=25℃	1.25	1.4	1.6	A
		YFW1117-XXX	YFW1117-ADJ		5	10	mA
Adjust Pin Current	IADJ				55	120	uA
Adjust Pin Current Change	IChange				0.2		

Electrical Characteristics (Ta=25℃, unless otherwise specified)

Quiescent Current	IQ	YFW1117-1.2	VIN-VOUT=1.25V		4	8	mA
		YFW1117-1.25					
		YFW1117-1.5					
		YFW1117-1.8					
		YFW1117-1.9					
		YFW1117-2.5					
		YFW1117-2.85					
		YFW1117-3.3					
		YFW1117-5.0					

Typical Characteristic

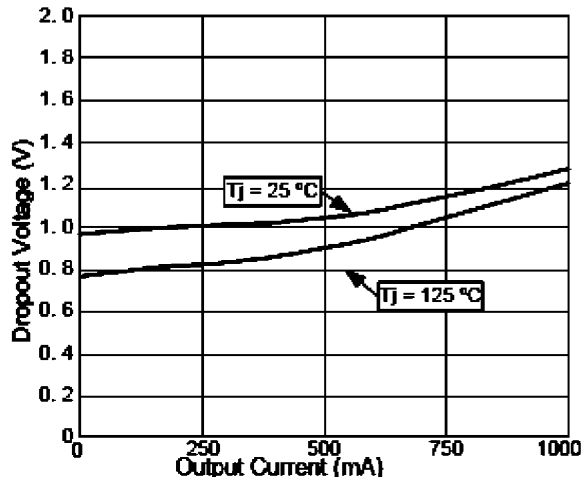


Fig.1 Dropout Voltage vs Output Current

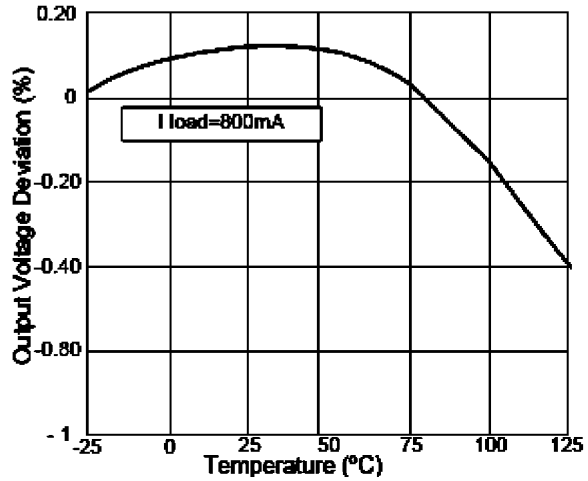


Fig.2 Load Regulation vs Temperature

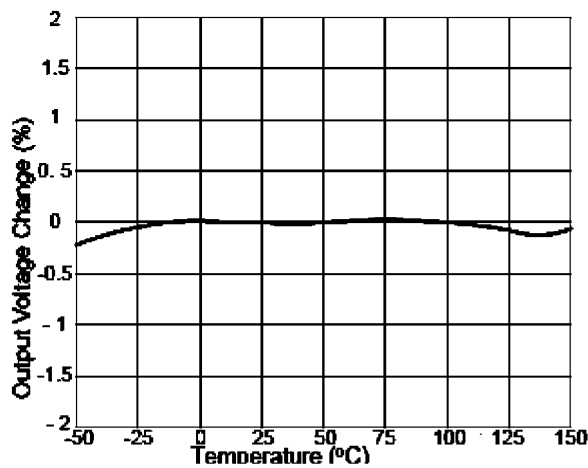


Fig.3 Percent Change in Output Voltage vs Temperature

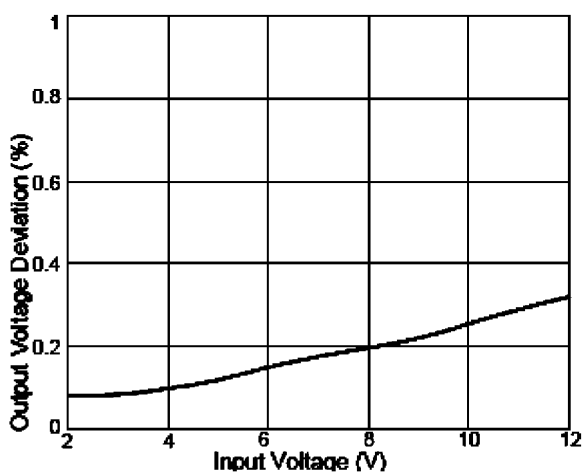


Fig.4 Line Regulation

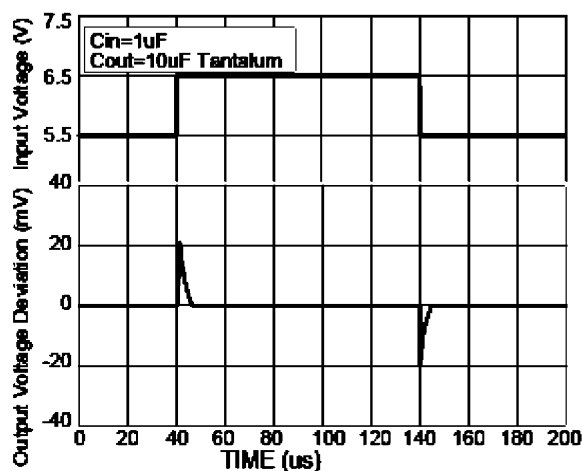


Fig.5 Line Transient Response

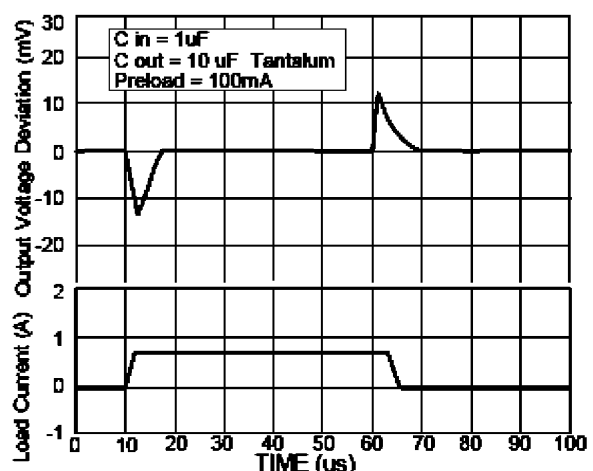


Fig.6 Load Transient Response

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-89	Tape/Reel, 7" reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-89

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.40	1.60	0.055	0.063
b	0.32	0.52	0.013	0.020
b1	0.38	0.58	0.015	0.023
c	0.35	0.45	0.014	0.018
D	4.40	4.60	0.173	0.181
D1	1.45	1.65	0.057	0.065
D2	1.70	1.80	0.067	0.071
E	2.30	2.60	0.091	0.102
E1	3.95	4.25	0.156	0.167
E2	1.80	2.00	0.071	0.079
e	1.40	1.60	0.055	0.063
e1	2.80	3.20	0.110	0.126
L	0.90	1.20	0.035	0.047

The recommended mounting pad size

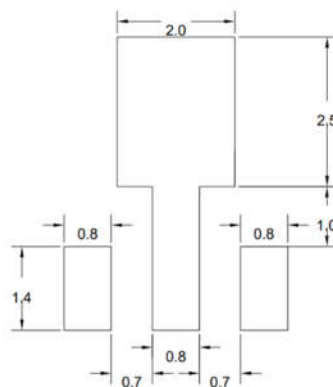

UNIT:MM

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.