


3-Terminal 1.0A Positive Voltage Regulator

Description


The 78M08AS three-terminal positive regulators are available in the TO-263 package with several fixed output voltages making it useful in a wide range of applications.

Features

- ◆ Output Current up to 1.0A
- ◆ Output Voltages of 8V
- ◆ Thermal Overload Protection
- ◆ Short Circuit Protection
- ◆ Output Transistor Safe Operating area (SOA) Protection

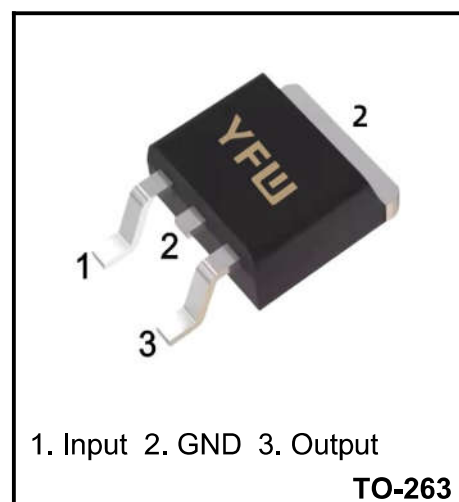

Internal Block Diagram

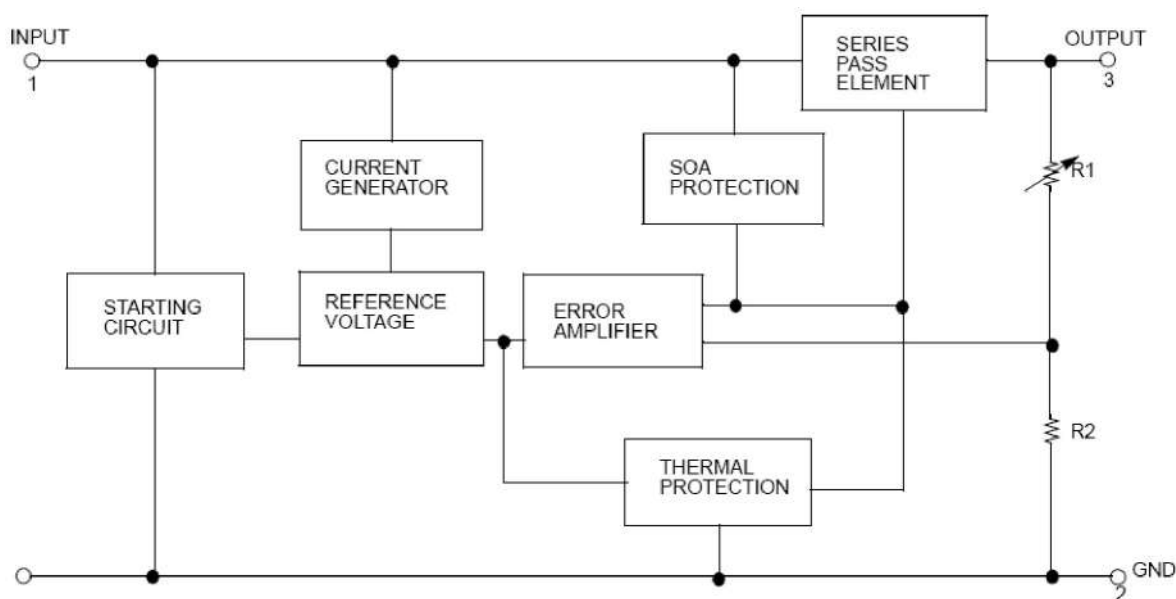

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage	V_{IN}	30	V
Out put Voltage	V_O	8	V
Operating Temperature Range	T_{OPR}	0 ~ + 125	°C
Storage Temperature Range	T_{STG}	-55 ~ + 150	°C

Electrical Characteristics

(Refer to the test circuits, $I_O=500mA$, $V_I=14V$, $C_I=0.33\mu F$, $C_O=0.1\mu F$ unless otherwise specified)

Parameter	Symbol	Conditions		Value			Unit
				Min	Typ	Max	
Output Voltage	V_O	$T_J = +25^{\circ}C$		7.68	8.0	8.32	V
		$I_O = 5mA \sim 1A$ $V_I=10.5 \sim 23V$		7.6	8.0	8.4	
Line Regulation(Note)	ΔV_O	$T_J = 25^{\circ}C$	$V_I = 10.5V \sim 25V$			160	mV
			$V_I = 11.5V \sim 17V$			80	
Load Regulation(Note)	ΔV_O	$T_J = 25^{\circ}C$	$I_O = 5mA \sim 1.0A$			200	mV
			$I_O = 250mA \sim 750mA$			100	
Quiescent Current	I_Q	$T_J = 25^{\circ}C$				8.0	mA
Quiescent Current Change	ΔI_Q	$I_O=5mA \sim 1.0A$				0.5	mA
		$V_I = 10.5 \sim 25V$				1.0	
Output Voltage Drift	$\Delta V / \Delta T$	$I_O = 5mA$			-0.8		mV/ $^{\circ}C$
Output Noise Voltage	V_N	$f = 10HZ \sim 100KHZ$			52		μV
Ripple Rejection	RR	$f = 120Hz$, $V_I = 11.5 \sim 21.5V$			80		dB
Dropout Voltage	V_D	$I_O = 1A$, $T_J = 25^{\circ}C$			2		V
Short Circuit Current	I_{SC}	$V_I = 35V$, $T_J = 25^{\circ}C$			230		mA
Peak Current	I_{PK}	$T_J = 25^{\circ}C$			1.6		A

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

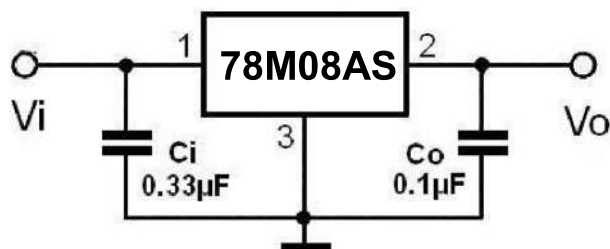


Figure.1 DC Parameter

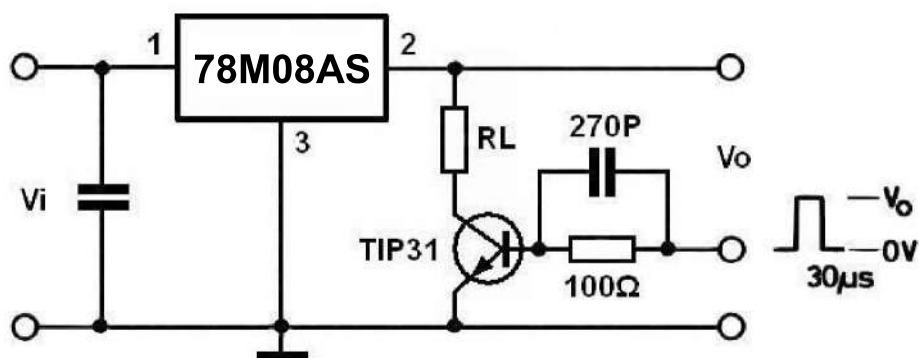


Figure.2 Load Regulation

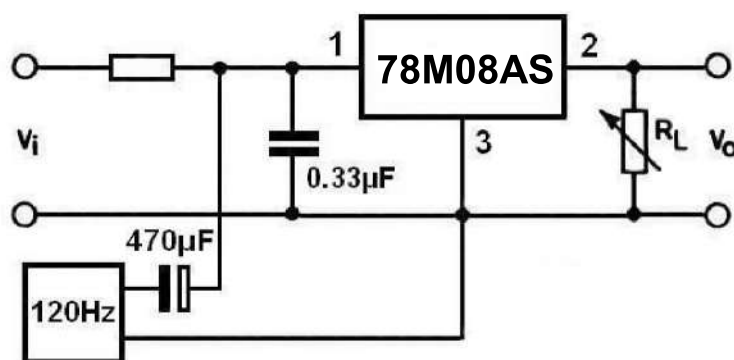


Figure.3 Ripple Rejection

Typical Characteristics

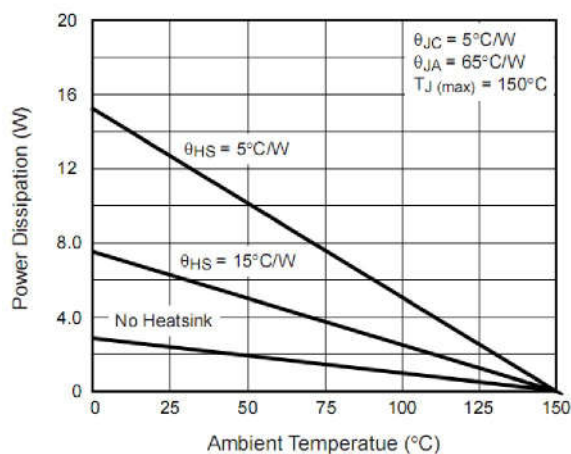


Figure. 4 Power Dissipation vs. Ambient Temperature

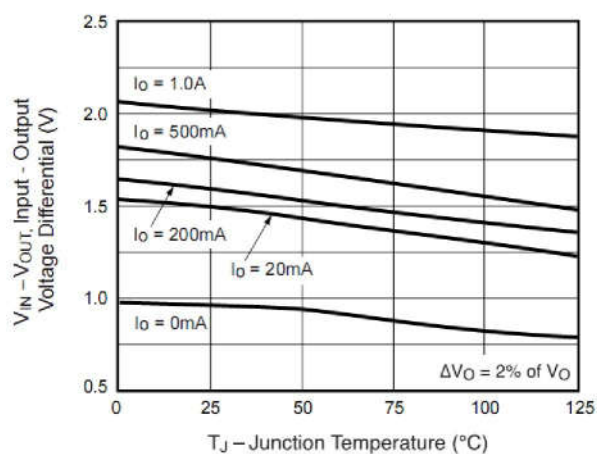


Figure.5 Dropout Voltage vs. Junction Temperature

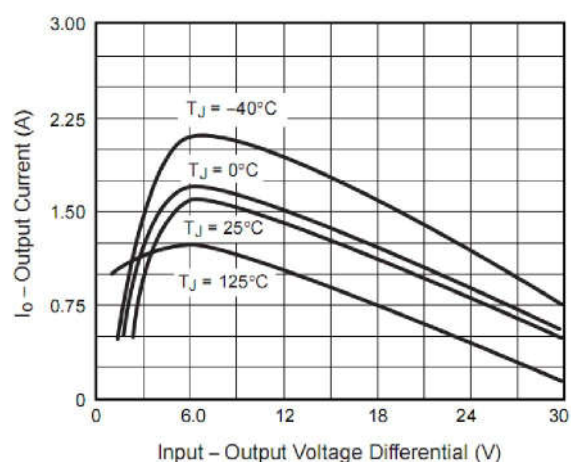


Figure.6 Peak Output Current

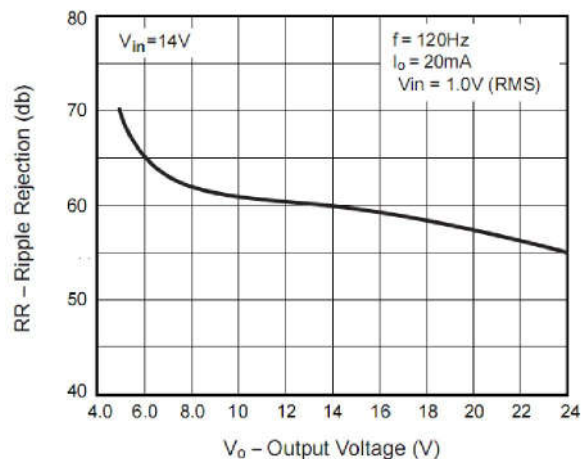


Figure.7 Ripple Rejection Ratio vs. Output Voltage

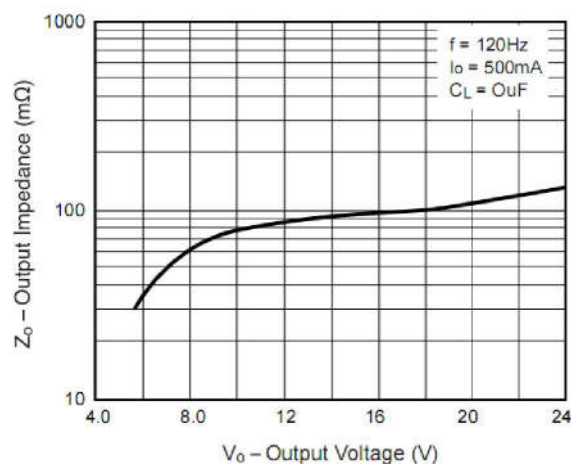


Figure.8 Output Impedance (mΩ) vs. Output Voltage

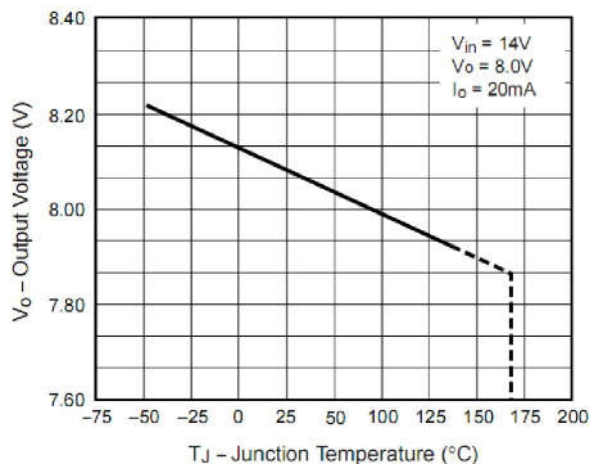


Figure.9 Output Voltage vs. Junction Temperature

Typical Characteristics

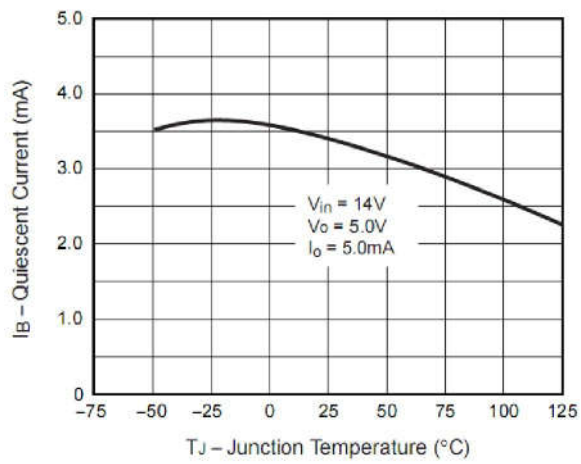


Figure.10 Quiescent Current vs. Junction Temperature


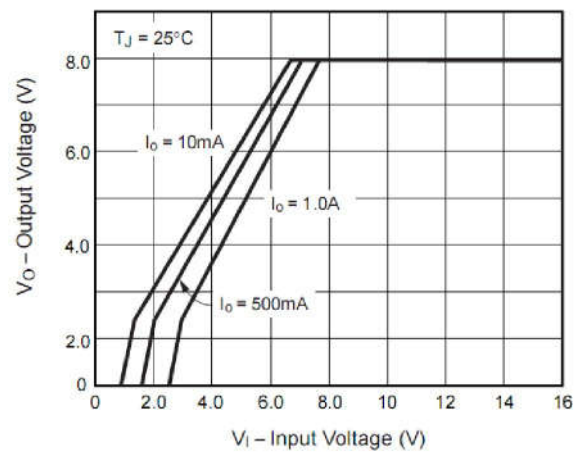


Figure.11 Output Voltage vs. Input Voltage

Marking Diagram

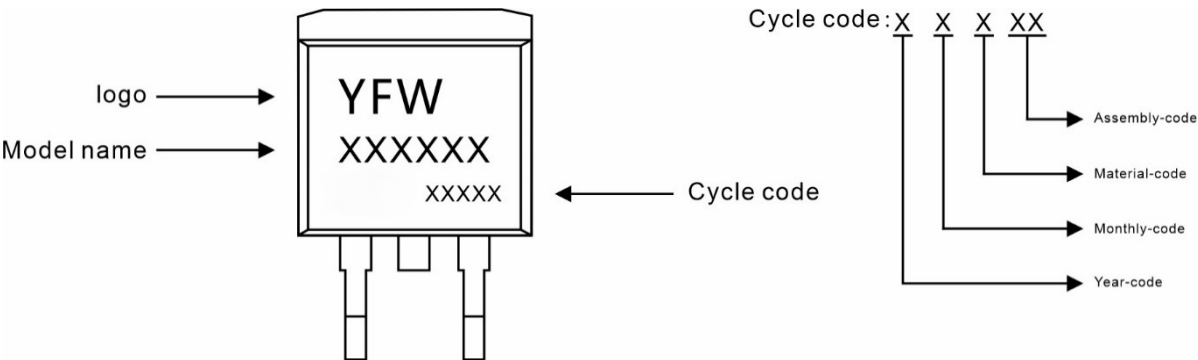

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
78M08AS	TO-263	0.04oz(1.16g)	800pcs/reel	1600pcs/box 8000pcs/Carton

Package Dimensions
TO-263

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A1	0.00	0.15	0.000	0.006
A2	4.30	4.55	0.169	0.179
B	1.10	1.50	0.043	0.059
b	0.70	0.90	0.028	0.035
b1	1.20	1.50	0.047	0.059
c	0.30	0.60	0.012	0.024
c1	1.17	1.37	0.046	0.054
D	9.90	10.20	0.390	0.402
E	8.50	8.90	0.335	0.350
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
L	15.00	15.30	0.591	0.602
L1	5.20	5.40	0.205	0.213
L2	2.40	2.60	0.094	0.102
L3	1.60	1.80	0.063	0.071

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.