

SCHOTTKY BARRIER RECTIFIER
Reverse Voltage - 45 V
Forward Current - 30 A
Features

- ♦Low forward voltage
- ♦High current capability
- ♦High forward surge capability
- ♦Low power losses, High efficiency
- ♦Guarding for over voltage protection

APPLICATIONS


Low VF Schottky barrier rectifier are designed for high frequency, miniature switched mode power supplies such as adapters ,lighting and on-board DC/DC conerters

MECHANICAL DATA

- ♦Case: Molded plastic
- ♦Polarity: As marked
- ♦Mounting Position: Any
- ♦Molded Plastic: UL Flammability Classification Rating 94V-0
- ♦Lead free in compliance with EU RoHS 2011/65/EU directive
- ♦Solder bath temperature 275°C maximum,10s per JESD 22-B106

Primary Characteristic

I_o	2*15A
V_{RRM}	45V
I_{FSM}	260A
V_F	0.40V
T_J Max	150°C

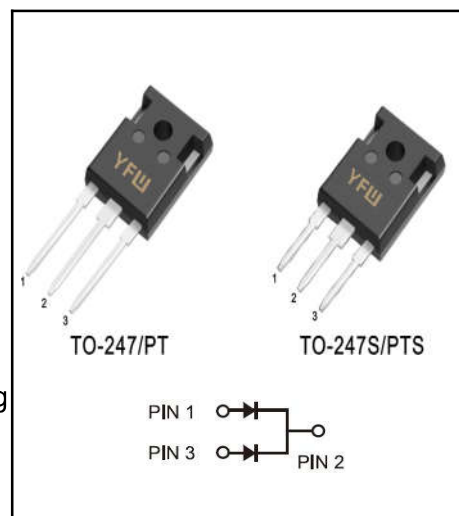
Maximum Ratings (Per Leg) At Ta=25°C Unless Otherwise Specified

Characteristics		Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	45	V
Working Peak Reverse Voltage		V_{RWM}	31.5	V
Maximum DC Blocking Voltage		V_{DC}	45	V
Maximum Average Forward Rectified Current	Per Leg	I_o	15	A
	Total		30	
Peak Forward Surge Current,8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)		I_{FSM}	260	A
Operating Temperature Range		T_J	150	°C
Storage Temperature Range		T_{STG}	-40 to +150	°C
Typical Thermal Resistance (Note1)		R_{θJC}	2	°C/W





Note1: Thermal resistance from Junction to case per leg mounted on heatsink.

Electrical Characteristics (Per Leg) unless otherwise specified


Characteristics		Symbol	Value		Unit
Forward Voltage Drop(Note2)		V_F	Typ.	Max.	V
at I _F =5A	TA=25°C		0.38	-	
	TA=125°C		0.28	-	
at I _F =10A	TA=25°C		0.43	-	
	TA=125°C		0.34	-	
at I _F =15A	TA=25°C		0.46	0.55	
	TA=125°C		0.40	-	
Maximum Reverse Current at V _R =45V	TA=25°C	I_R	56	200	μA
	TA=125°C		20	-	mA

Note2:Pulse test: 300 μs pulse width, 1 % duty cycle

Ratings And Characteristic Curves

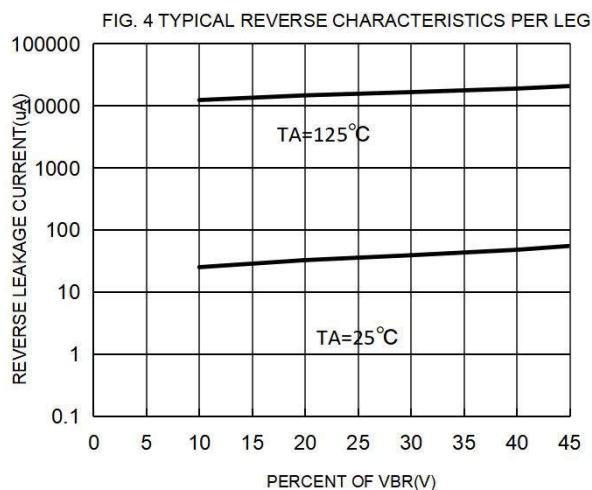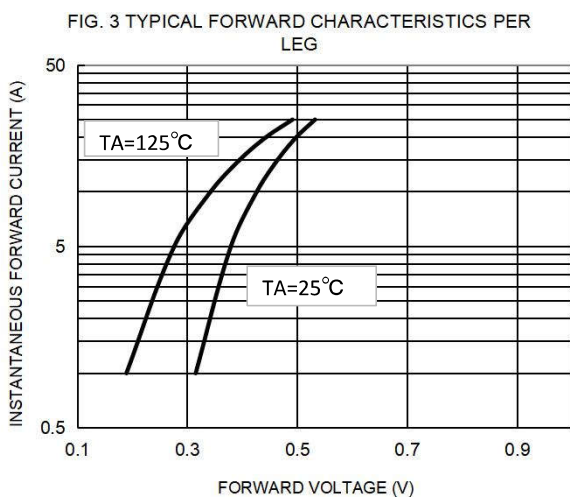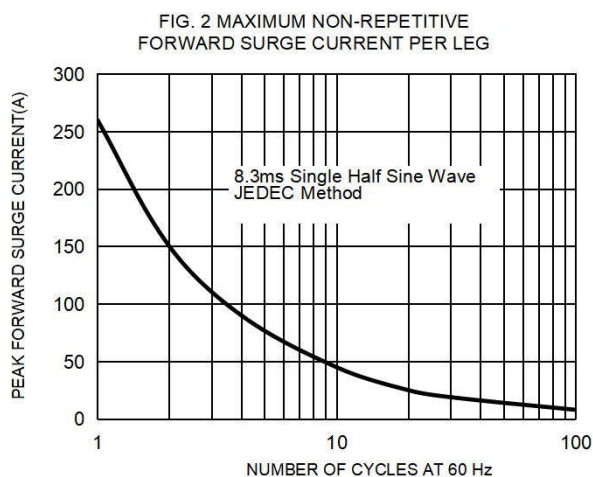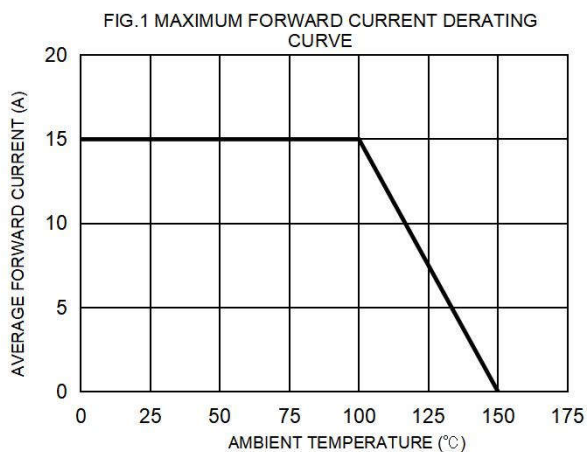

Marking Diagram

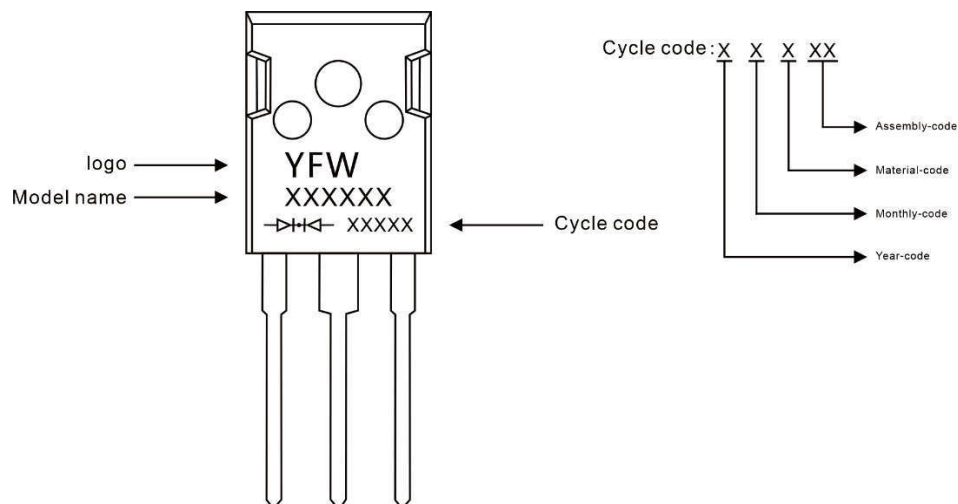

Ordering information


Model name	Package	Unit Weight	Base Quantity	Packing Quantity
SRT30L45PT	TO-247	0.209oz(5.93g)	30pcs/tube	600PCS/Box 2400PCS/Carton

Package Dimensions

TO-247

Symbol	Dimensions in mm		Dimensions in Inch	
	Min.	Max.	Min.	Max.
A	4.90	5.10	0.193	0.201
A1	1.90	2.10	0.075	0.083
A2	2.29	2.54	0.090	0.100
b	1.00	1.40	0.039	0.055
b1	2.00	2.20	0.079	0.087
b2	3.00	3.20	0.118	0.126
c	0.50	0.70	0.020	0.028
D	15.75	16.05	0.620	0.632
E	20.20	20.80	0.795	0.819
e	5.45 (BSC)		0.215 (BSC)	
e1	10.90 (BSC)		0.429 (BSC)	
F	6.05	6.25	0.238	0.246
F1	5.80	6.00	0.228	0.236
L	20.10	20.40	0.791	0.803
L1	4.05	4.35	0.159	0.171
Φ	3.50	3.70	0.138	0.146

Marking Diagram

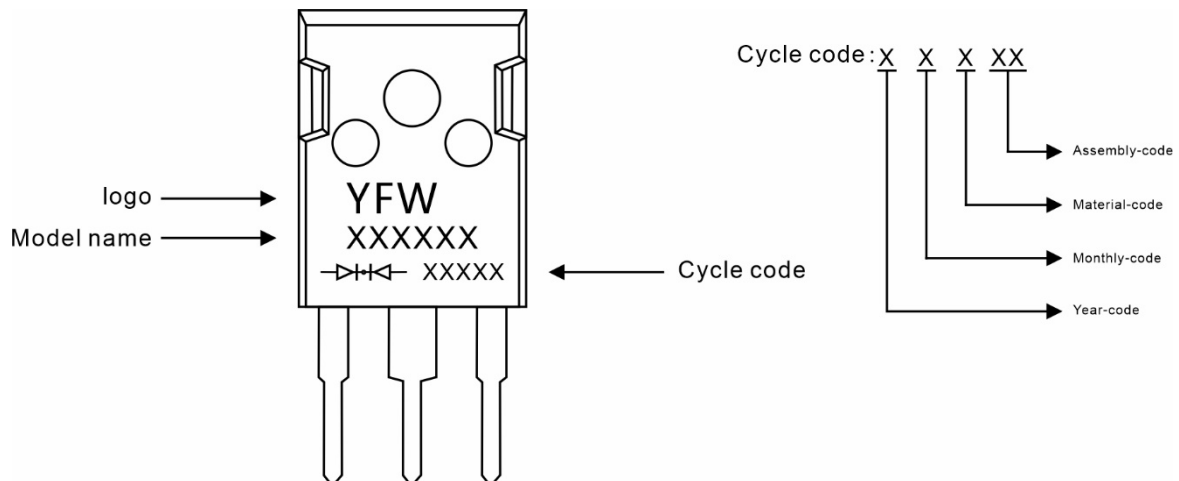

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
SRT30L45PTS	TO-247S	0.158oz(4.48g)	30pcs/tube	600PCS/Box 2400PCS/Carton

Package Dimensions

TO-247S

Symbol	Dimensions in mm		Dimensions in Inch	
	Min.	Max.	Min.	Max.
A	15.0	16.0	0.59	0.63
B	19.5	20.5	0.77	0.81
C	33.5	35.5	1.32	1.40
D	5.0	6.0	0.20	0.24
E	3.5	4.5	0.14	0.18
F	2.5	3.5	0.10	0.14
G	1.75	2.5	0.07	0.14
H	3.0	4.0	0.12	0.16
I	9.0	11.0	0.35	0.43
J	4.9	5.1	0.19	0.20
K	1.0	1.3	0.04	0.05
L	3.75	4.25	0.15	0.17
M	4.75	5.25	0.19	0.21
N	1.8	2.2	0.07	0.09
O	0.45	0.6	0.018	0.024
P	5.08		0.2	
Q	1.2	1.3	0.05	0.051

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.