

Plastic-Encapsulate Transistors


TRANSISTOR (PNP)

Features

- ◆ Low Collector-Emitter Saturation Voltage
- ◆ High Breakdown Voltage

Marking Code

MPSA92SI	A92
----------	-----

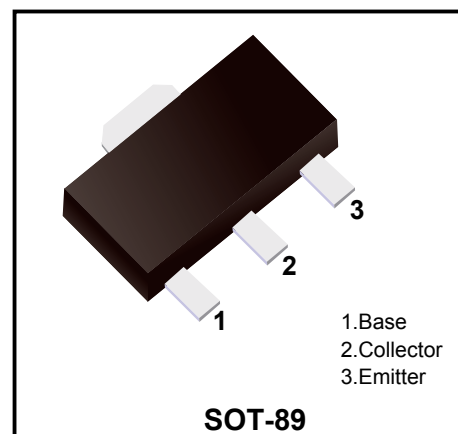

Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	300	V
Collector Emitter Voltage	$-V_{CEO}$	300	V
Emitter Base Voltage	$-V_{EBO}$	5	V
Collector Current	$-I_C$	500	mA
Power Dissipation	P_{tot}	500	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	- 55 to + 150	°C

Characteristics at Ta = 25°C

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain				
at $-I_C = 1\text{ mA}$, $-V_{CE} = 10\text{ V}$	h_{FE}	25	-	-
at $-I_C = 10\text{ mA}$, $-V_{CE} = 10\text{ V}$	h_{FE}	40	-	-
at $-I_C = 30\text{ mA}$, $-V_{CE} = 10\text{ V}$	h_{FE}	25	-	-
Collector Base Cutoff Current				
at $-V_{CB} = 200\text{ V}$	$-I_{CBO}$	-	0.25	μA
Emitter Base Cutoff Current				
at $-V_{EB} = 3\text{ V}$	$-I_{EBO}$	-	0.1	μA
Collector Base Breakdown Voltage				
at $-I_C = 100\text{ }\mu\text{A}$	$-V_{(BR)CBO}$	300	-	V
Collector Emitter Breakdown Voltage				
at $-I_C = 1\text{ mA}$	$-V_{(BR)CEO}$	300	-	V
Emitter Base Breakdown Voltage				
at $-I_E = 100\text{ }\mu\text{A}$	$-V_{(BR)EBO}$	5	-	V
Collector Emitter Saturation Voltage				
at $-I_C = 20\text{ mA}$, $-I_B = 2\text{ mA}$	$-V_{CE(sat)}$	-	0.5	V
Base Emitter Saturation Voltage				
at $-I_C = 20\text{ mA}$, $-I_B = 2\text{ mA}$	$-V_{BE(sat)}$	-	0.9	V
Gain Bandwidth Product				
at $-I_C = 10\text{ mA}$, $-V_{CE} = 20\text{ V}$, $f = 100\text{ MHz}$	f_T	50	-	MHz
Collector Output Capacitance				
at $-V_{CB} = 20\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	6	pF

Typical Characteristics

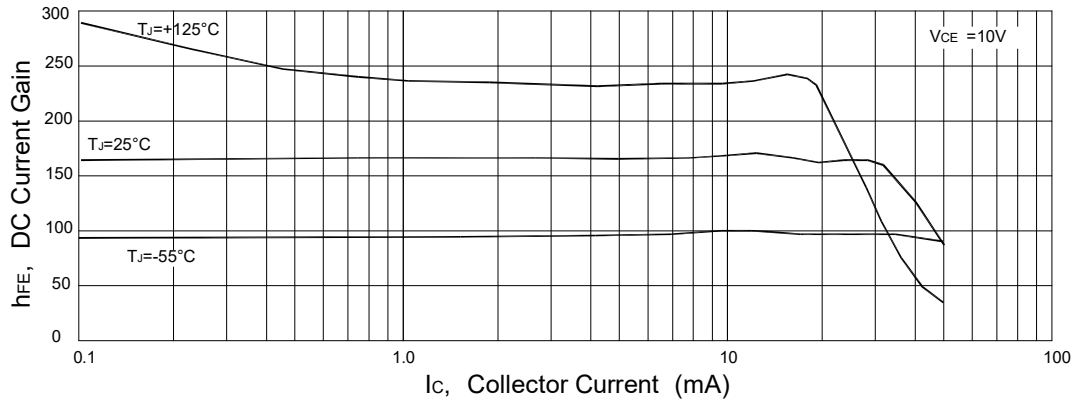


Figure 1. DC Current Gain

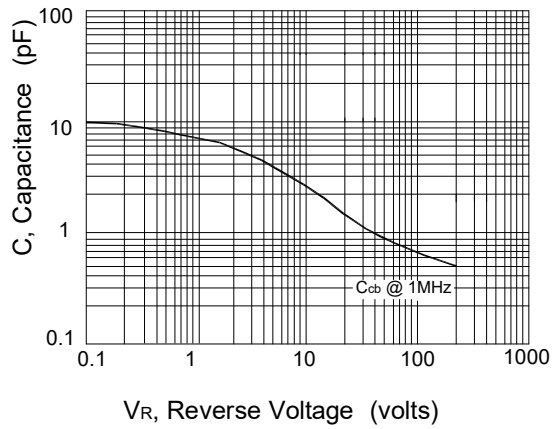


Figure 2. Capacitance


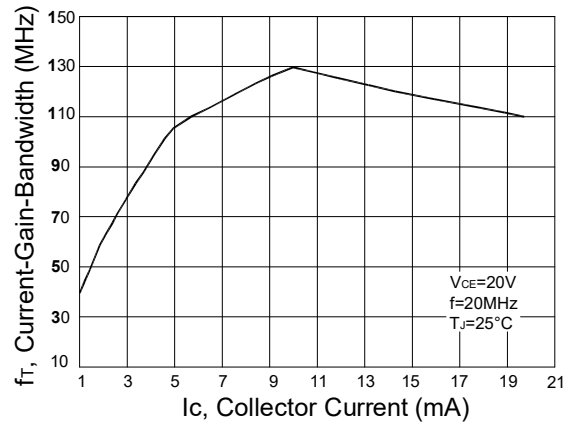


Figure 3. Current-Gain-Bandwidth

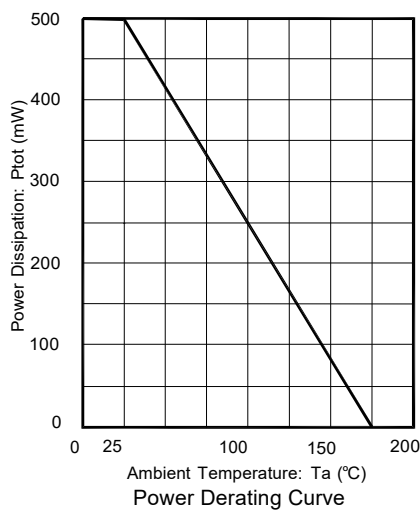

Power Derating Curve

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-89	Tape/Reel, 7" reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-89

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.40	1.60	0.055	0.063
b	0.32	0.52	0.013	0.020
b1	0.38	0.58	0.015	0.023
c	0.35	0.45	0.014	0.018
D	4.40	4.60	0.173	0.181
D1	1.45	1.65	0.057	0.065
D2	1.70	1.80	0.067	0.071
E	2.30	2.60	0.091	0.102
E1	3.95	4.25	0.156	0.167
E2	1.80	2.00	0.071	0.079
e	1.40	1.60	0.055	0.063
e1	2.80	3.20	0.110	0.126
L	0.90	1.20	0.035	0.047

The recommended mounting pad size

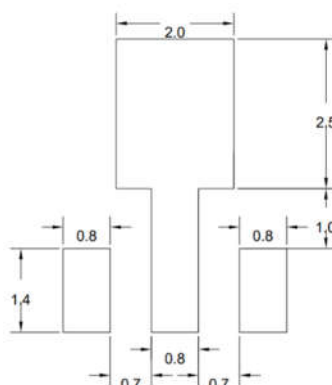

UNIT:MM

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.