

NPN Plastic-Encapsulate Transistors
Applications

- DC-DC converter
- Solenoid driver or motor driver

Features


- Low collector-emitter saturation voltage

$V_{CE(sat)}=0.1V$ Typ.(@ $I_C/I_B=2.0A/0.2A$)

- Large collector current.

$I_C=5.0A, I_{CP}=8.0A$

- Complementary to 2SB1151

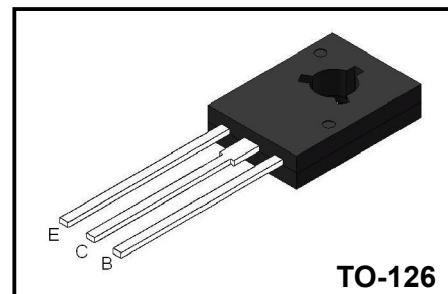
TO-126
Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Value	Unit	
Collector-Base Voltage	BV_{CBO}	60	V	
Collector-Emitter Voltage	BV_{CEO}	60	V	
Emitter-Base Voltage	BV_{EBO}	7	V	
Collector Current(DC)	I_C	5	A	
Collector current (pulse)*	I_{CP}	8	A	
Collector Power Dissipation	Ta=25°C	P_C	1.3	W
	Tc=25°C		20	V
Junction Temperature	T_J	150	°C	
Storage Temperature	T_{stg}	-55~150	°C	

* PW≤10ms, duty Cycle≤50%

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Collector-base breakdown voltage	BV_{CBO}	$I_C = 100\mu A, I_E = 0$	60			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C = 10mA, I_B = 0$	60			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = 100\mu A, I_C = 0$	7			V
Collector cut-off current	I_{CBO}	$V_{CB} = 50V, I_E = 0$			10	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 7V, I_C = 0$			10	μA
DC current gain	h_{FE1}	$V_{CE} = 1V, I_C = 0.1A$	60			
	h_{FE2}	$V_{CE} = 1V, I_C = 2A$	100		400	
	h_{FE3}	$V_{CE} = 1V, I_C = 5A$	50		160	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 2A, I_B = 0.2A$		0.1	0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 2A, I_B = 0.2A$		0.9	1.2	V

* Pulse test: PW≤50μs, duty Cycle≤2% Pulsed

 h_{FE} 2 Classification

Classification	O	Y	G
Range	100~200	160~320	200~400
Marking	YFW 2SD1691 O	YFW 2SD1691 Y	YFW 2SD1691 G

Typical Characteristics

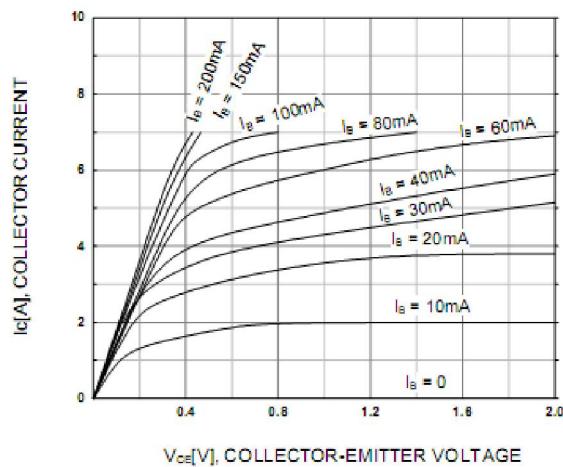


Figure 1. Static Characteristic

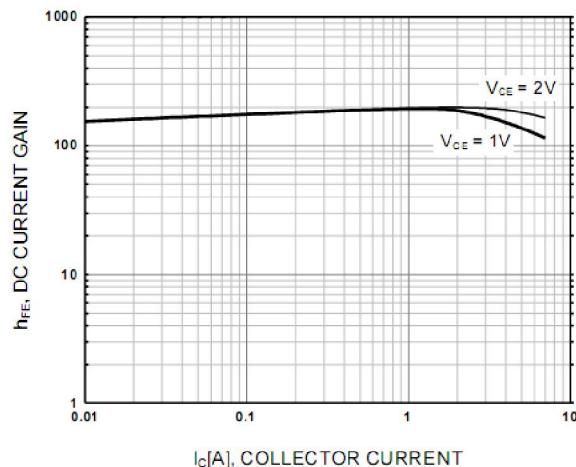


Figure 2. DC current Gain

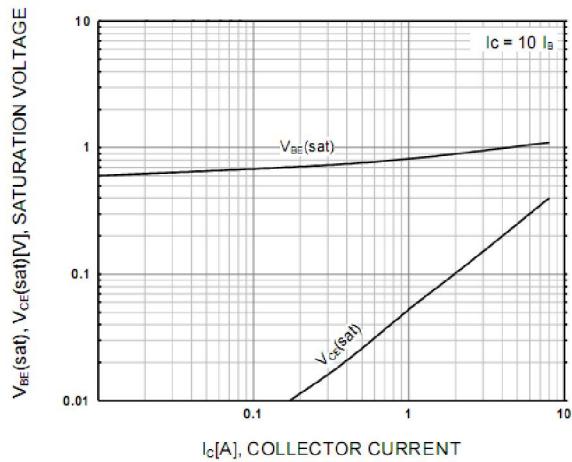


Figure 3. Collector-Emitter Saturation Voltage
Base-Emitter Saturation Voltage

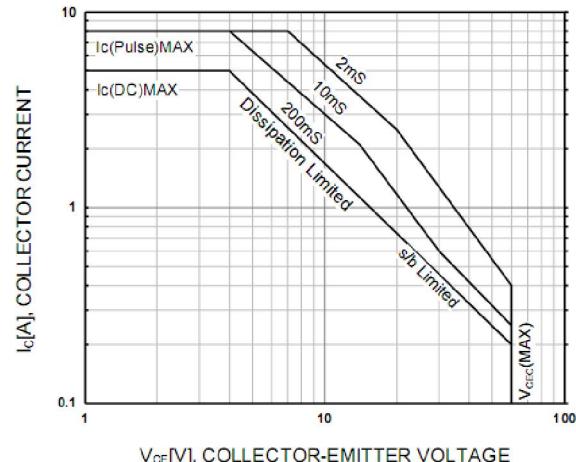


Figure 4. Forward Bias Safe Operating Area

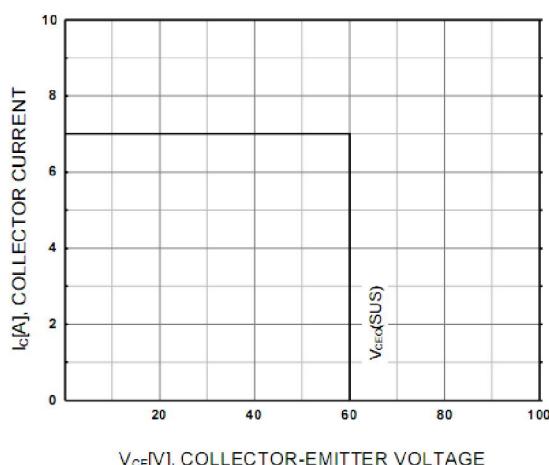


Figure 5. Reverse Bias Safe Operating Area

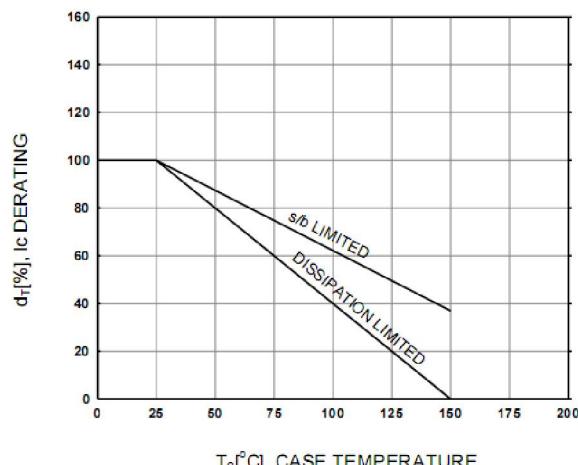



Figure 6. Derating Curve of Safe Operating Areas

Ordering information

Package	Packing Description	Base Quantity
TO-126	Bulk	500pcs/Bag

Package Dimensions
TO-126

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.40	2.80	0.094	0.110
A1	1.00	1.40	0.039	0.055
b	0.66	0.86	0.026	0.034
b1	1.17	1.37	0.046	0.054
c	0.40	0.60	0.016	0.024
D	7.30	7.70	0.287	0.303
E	10.60	11.00	0.417	0.433
e	2.25	2.33	0.089	0.092
e1	4.50	4.66	0.177	0.183
L	14.00	15.00	0.551	0.591
L1	1.90	2.50	0.075	0.098
Φ	3.10	3.30	0.122	0.130

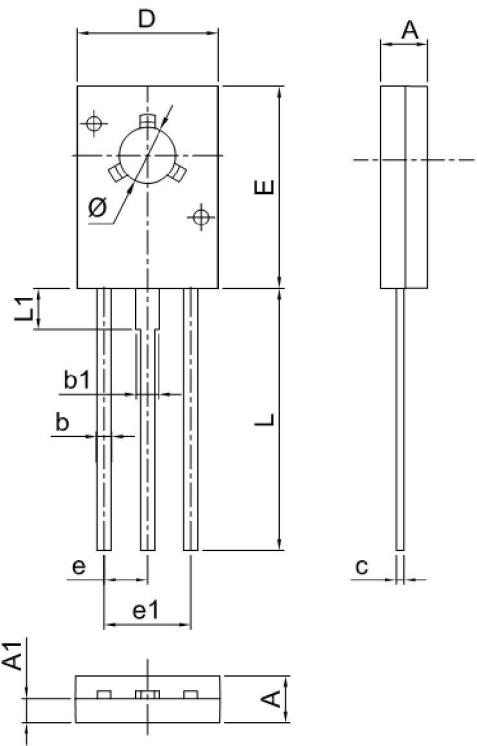

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices). YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.