


3-Terminal 1.5A Positive Voltage Regulator

Features


- ◆ Output Current up to 1.5A
- ◆ Output Voltages of 12V
- ◆ Thermal Overload Protection Short Circuit Protection
- ◆ Output Transistor Safe Operating area (SOA)Protection

Description

The 7812AS three-terminal positive regulators are available in the TO-263 package with several fixed output voltages making it useful in a wide range of applications.

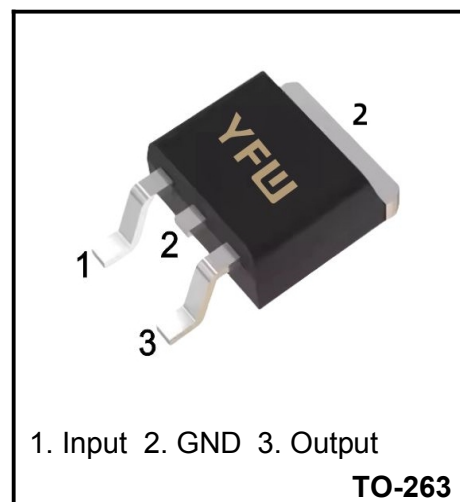

Internal Block Diagram

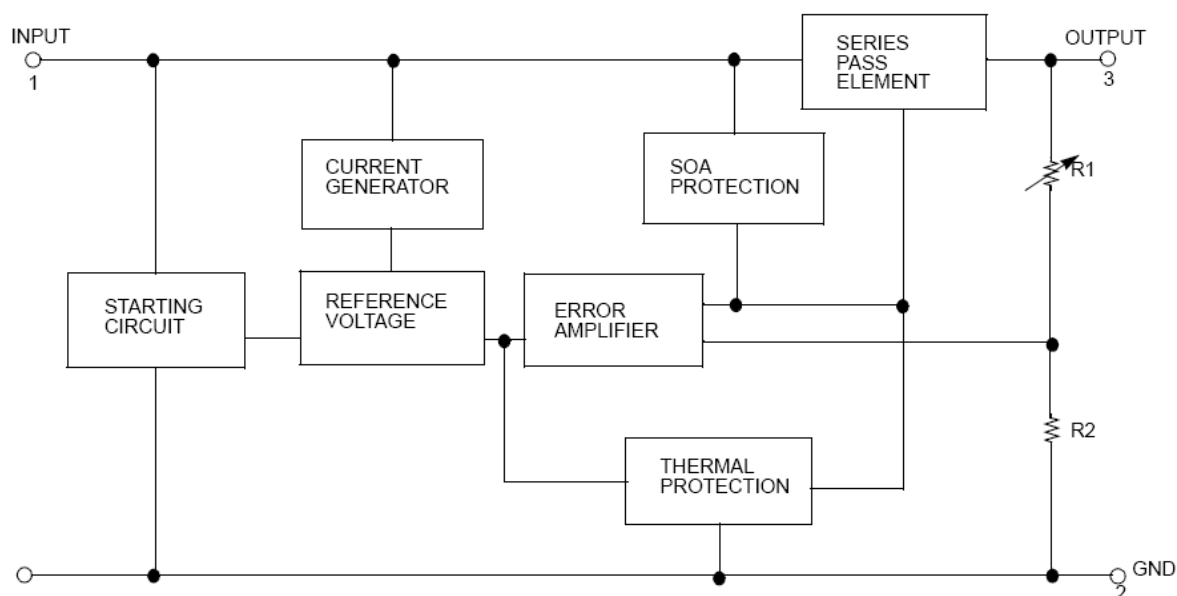

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage	V_{IN}	35	V
Thermal Resistance Junction-Case	$R_{\theta JC}$	2.5	°C/W
Thermal Resistance Junction-Air ($T_a = +25^{\circ}\text{C}$)	$R_{\theta JA}$	92	°C/W
Operating Junction Temperature Range	T_{OPR}	0 ~ 150	°C
Storage Temperature Range	T_{STG}	-55 ~ + 150	°C


Electrical Characteristics

(Refer to the test circuits , $I_o=500mA$, $V_I=19V$, $C_I=0.33\mu F$, $C_O=0.1\mu F$ unless otherwise specified)


Parameter	Symbol	Conditions		Value			Unit
				Min	Typ	Max	
Output Voltage		$T_j = 25^\circ C$		11.5	12	12.5	
	V_O	$I_o = 5mA \sim 750mA$ $V_I = 14.5 \sim 27V$		11.4	12	12.6	V
Line Regulation(Note)	ΔV_O	$T_j = 25^\circ C$	$V_I = 14.5V \sim 30V$			100	mV
			$V_I = 16V \sim 30V$			50	
Load Regulation(Note)	ΔV_O	$T_j = 25^\circ C$	$I_o = 5mA \sim 1.5A$			240	mV
			$I_o = 0.25A \sim 1.0A$			120	
Quiescent Current	I_Q	$T_j = 25^\circ C$				8.0	mA
Quiescent Current Change	ΔI_Q		$I_o = 5mA \sim 1.5A$			0.5	mA
			$I_o = 14.5V \sim 30V$			0.8	
Output Voltage Drift	$\Delta V / \Delta T$	$I_o = 5mA$			-0.8		mV/ $^\circ C$
Output Noise Voltage	V_N	$f = 10Hz \sim 100KHz$, $T_A = 25^\circ C$			75		μV
Ripple Rejection	RR	$f = 120Hz$, $V_I = 15 \sim 25V$			80		dB
Dropout Voltage	V_D	$I_o = 1.0A$, $T_j = 25^\circ C$			2		V
Short Circuit Current	I_{SC}	$V_I = 35V$, $T_A = 25^\circ C$			200		mA
Peak Current	I_{PK}	$T_j = 25^\circ C$			2.2		A

Notes:


Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

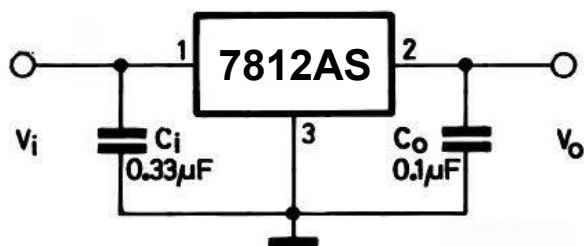

DC Parameter

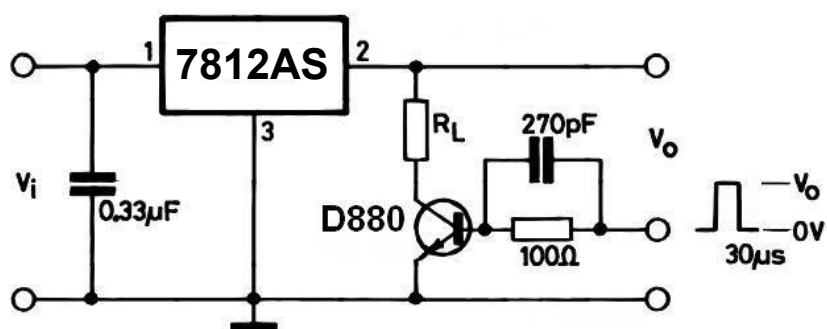


Load Regulation

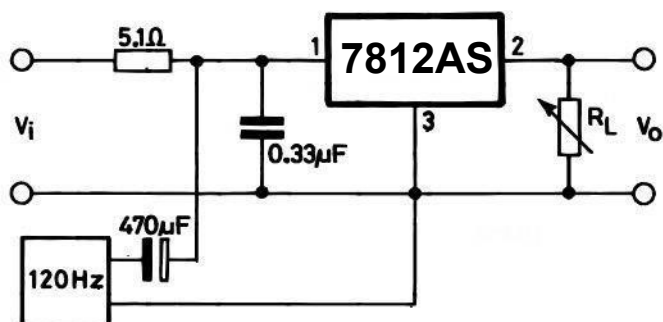

Ripple Rejection

Marking Diagram

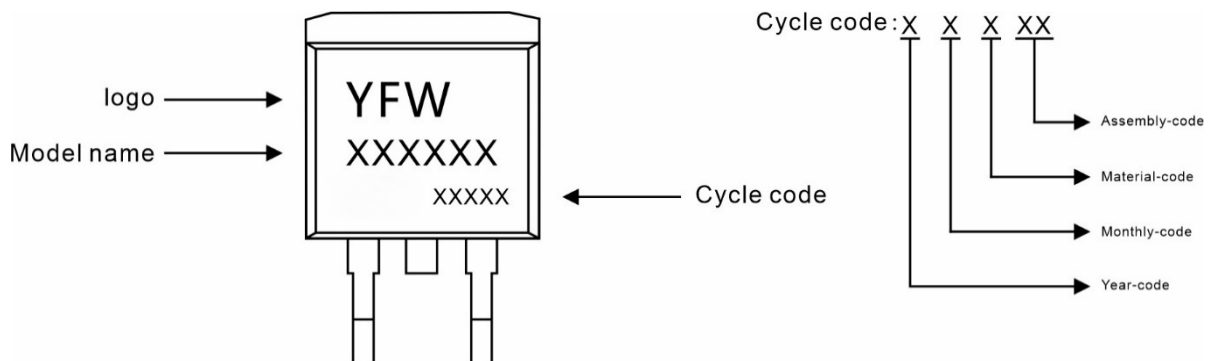

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
7812AS	TO-263	0.04oz(1.16g)	800pcs/reel	1600pcs/box 8000pcs/Carton

Package Dimensions TO-263

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A1	0.00	0.15	0.000	0.006
A2	4.30	4.55	0.169	0.179
B	1.10	1.50	0.043	0.059
b	0.70	0.90	0.028	0.035
b1	1.20	1.50	0.047	0.059
c	0.30	0.60	0.012	0.024
c1	1.17	1.37	0.046	0.054
D	9.90	10.20	0.390	0.402
E	8.50	8.90	0.335	0.350
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
L	15.00	15.30	0.591	0.602
L1	5.20	5.40	0.205	0.213
L2	2.40	2.60	0.094	0.102
L3	1.60	1.80	0.063	0.071

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.