

Fast Recovery High Voltage Diodes

Reverse Voltage –20KV

Forward Current –50mA

FEATURES


- ♦Supersmall size
- ♦High reliability
- ♦High speed switching

APPLICATIONS

Rectification for high voltage power supply of color T.V、CRT display、V.T.R camera and Others

MECHANICAL DATA

- ♦Case: DO-312
- ♦Epoxy meets UL 94V-0 flammability rating
- ♦Terminals: Pure tin plated leads, solderable per J-STD-002 and JESD22-B102, E3 suffix for consumer grade, meet JESD201 class 1A whisker test.
- ♦Polarity: Color band denotes cathode end

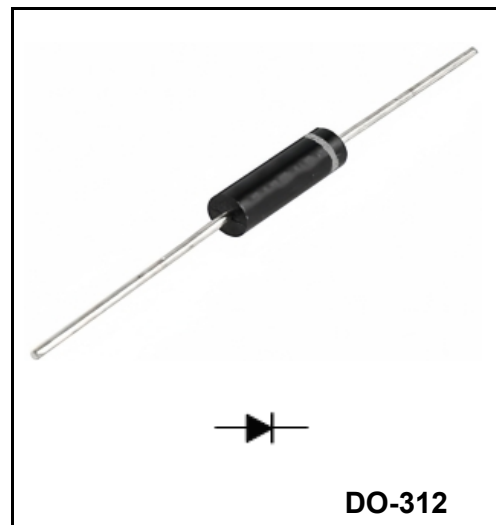

Marking Code

2CL0520

YFW 0520

Maximum rating (Ta=25°C unless otherwise noted)

Parameter		Symbols	2CL0520	Units
Repetitive peak reverse voltage		V_{RRM}	20	KV
Non-Repetitive peak reverse voltage		V_{RSM}	22	KV
Average forward current	60Hz half-sine wave, Resistance load, Ta=25°C	$I_{F(AV)}$	50	mA
Surge(Non-repetitive)forward current	60Hz half-sine wave, 1cycle, Ta=25°C	I_{FSM}	3	A
Peak forward voltage	$I_{FM}=50mA$	V_{FM}	55	V
Peak reverse current $V_{RM}=V_{RRM}$	Ta=25°C	I_{RRM}	2	μA
	Ta=100°C		5	
Reverse recovery time	$I_F=2mA$, $I_{RM}=4mA$	t_{rr}	0.15	μs
Operating ambient temperature		Ta	-40 ~ +100	°C
Storage Temperature Range		Tstg	-40 ~ +120	°C
Virtual junction temperature		T(vj)	120	°C


Ordering information

Package	Packing Description	Packing Quantity
DO-312	ammo pack	5000PCS/Inner Box 50000PCS/Carton

Package Dimensions(Millimeter(mm))

DO-312

Lead Diameter 0.6 ± 0.03

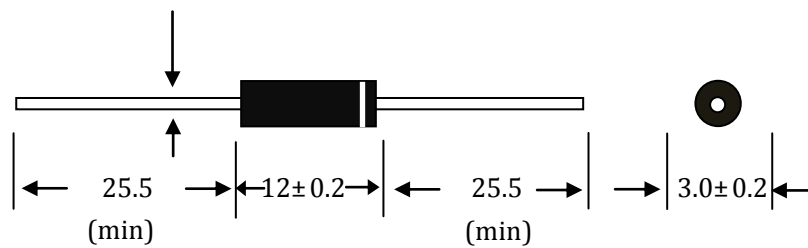

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.