


Thyristors Surge Protection Device

Features

- ◆ For surface mounted applications to optimize board space
- ◆ Low profile package
- ◆ Bidirectional crowbar protection
- ◆ Low leakage current : $I = 5\mu A$ max
- ◆ Low on-state voltage
- ◆ Solid-state silicon technology

Application


- ◆ TIA-968-A/B
- ◆ ITU K.20/21 Enhanced Level*
- ◆ ITU K.20/21 Basic Level*
- ◆ GR 1089 Inter-building*
- ◆ GR 1089 Intra-building
- ◆ IEC 61000-4-5 2nd edition
- ◆ YD/T 1082 YD/T 993 YD/T 950

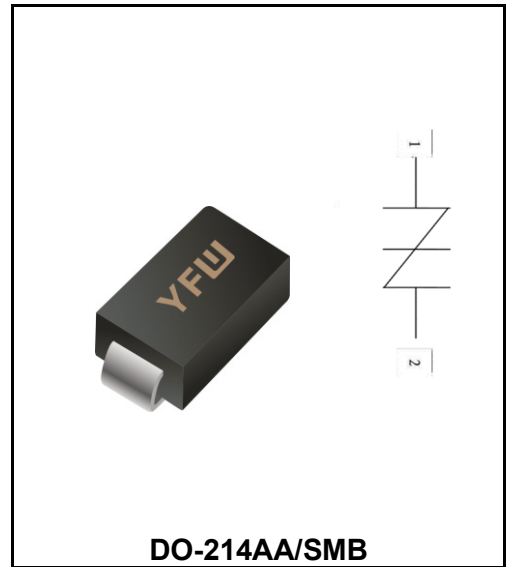

Absolute Maximum Ratings (TA=25°C, RH=45%-75%, unless otherwise noted)


Parameter	Symbol	Value	Unit
Storage temperature range	Tstg	-60 to +150	°C
Operating junction temperature range	Tj	-40 to +150	°C

Part Number Code

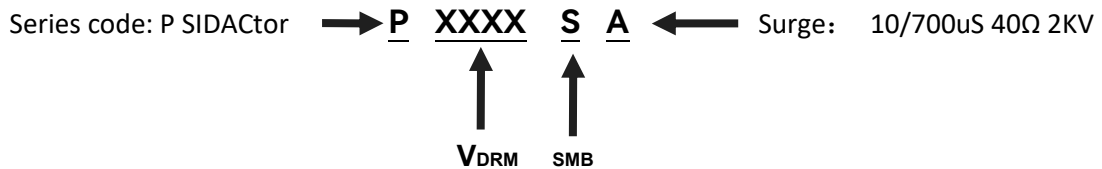

Electrical Parameters & V-I Curve

Symbol	Parameter
V_{DRM}	Peak off-state voltage
I_{DRM}	Off-state current
V_s	Switching voltage
I_s	Switching current
V_T	On-state voltage
I_T	On-state current
I_H	Holding current
C_o	Off-state capacitance

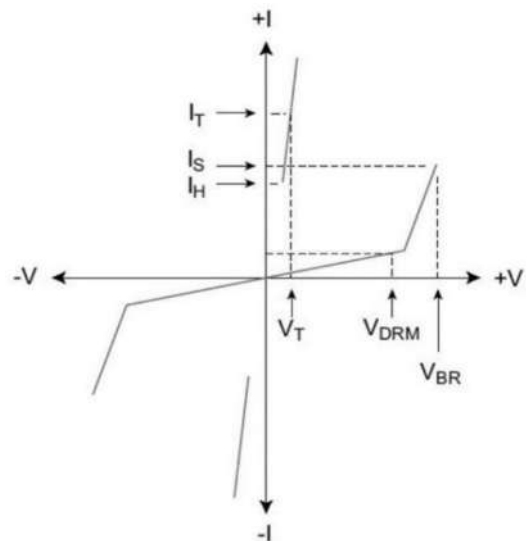

Electrical Characteristics (TA=25°C)

Type	V _{DRM}	I _{DRM}	V _s	I _s	V _T	I _T	C _o	I _H
	Min.	Max.	Max.	Max.	Max.		Typ.	Min.
	V	uA	V	mA	V	A	pF	mA
P0080SA	6	5	25	800	4	2.2	50	20
P0220SA	15	5	32	800	4	2.2	50	50
P0300SA	25	5	40	800	4	2.2	70	50
P0640SA	58	5	77	800	4	2.2	50	100
P0720SA	65	5	88	800	4	2.2	50	100
P0900SA	75	5	98	800	4	2.2	45	100
P1100SA	90	5	130	800	4	2.2	45	100
P1300SA	120	5	160	800	4	2.2	45	100
P1500SA	140	5	180	800	4	2.2	40	100
P1800SA	170	5	220	800	4	2.2	40	100
P2000SA	180	5	220	800	4	2.2	40	100
P2300SA	190	5	260	800	4	2.2	35	100
P2600SA	220	5	300	800	4	2.2	35	100
P3100SA	275	5	350	800	4	2.2	30	100
P3500SA	320	5	400	800	4	2.2	30	100
P4000SA	360	5	460	800	4	2.2	30	100
P4500SA	420	5	540	800	4	2.2	30	100
P5000SA	500	5	600	800	4	2.2	30	100

Notes:

- All measurements are made at an ambient temperature of 25°C. IPP applies to -40°C through +85°C temperature range.
- Off-state capacitance (CO) is measured at 1 MHz with a 2 V bias and is typical value.

Ratings And V-I Characteristics Curves (TA=25°C, unless otherwise noted)

FIG.1: tr × td pulse waveform

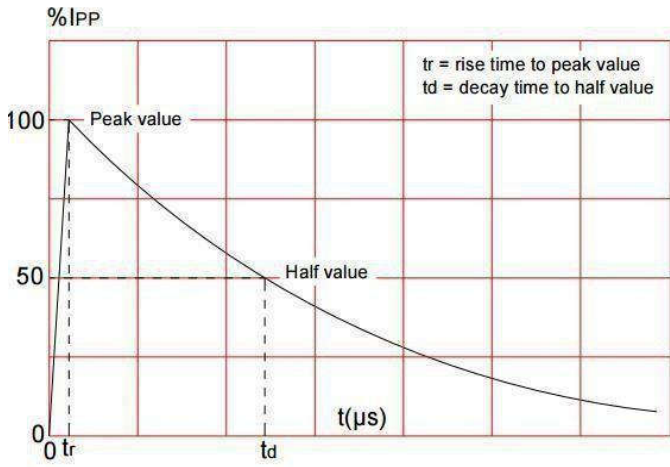


FIG.2: Reflow condition

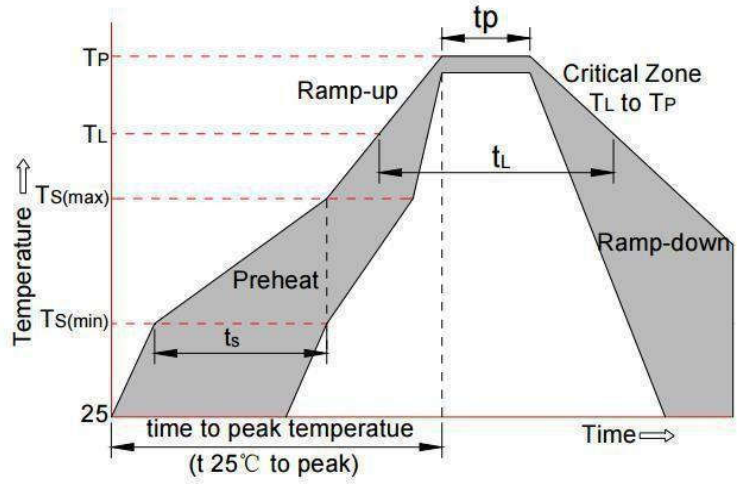


FIG.3: Normalized Vs change vs. junction temperature



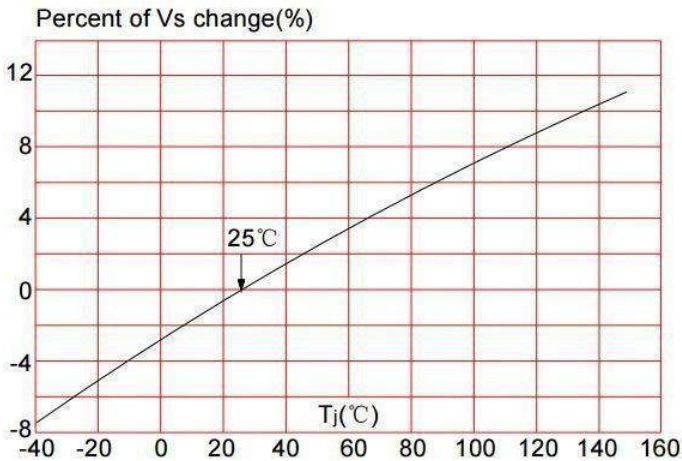


FIG.4: Normalized DC holding current vs. case temperature

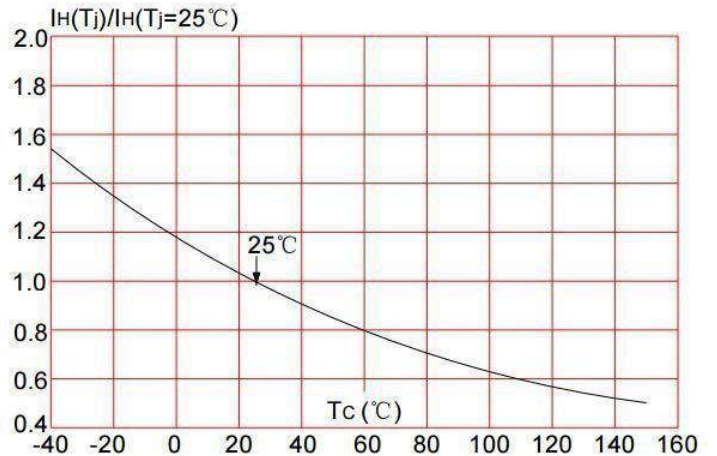

Marking Diagram

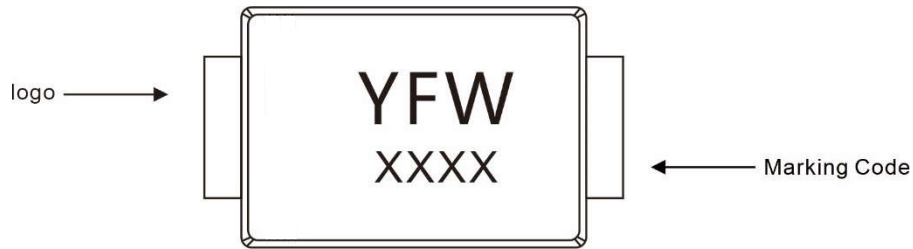

Ordering information


Package	Packing Description	Packing Quantity
DO-214AA SMB	Tape/Reel, 13" reel	3000PCS/Reel 30000PCS/Carton

Package Dimensions

DO-214AA SMB

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	2.13	2.44	84	96
E	4.06	4.70	160	185
D	3.3	3.94	130	155
E ₁	5.08	5.59	200	220
A ₁	0.05	0.20	2.0	7.9
L	0.8	1.5	32	59
C	0.152	0.305	6	12
b	1.9	2.2	75	87

The recommended mounting pad size

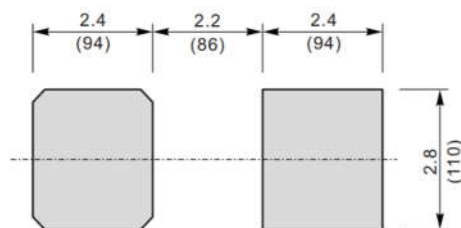

Unit : $\frac{\text{mm}}{\text{mil}}$

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.